



Source Book

Your Guide to Performance Floor Coverings



2

RG 19, CT 32, LM 39
Windsor



RG 10 - 11, CT 21, LM 40 - 41
Champion Super Nop



CT 23
Dominator



CT 24-25
Diplomat



CT 28
Atlas Plus




LVT 52 - 53
7" x 48" • 40MIL



LVT 54
Natures View Style Rustique 18" x 18"



GMT 60
Heron Tile

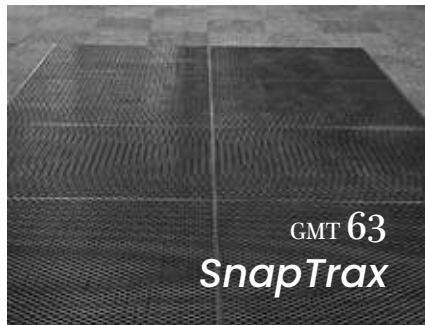

GMT 63
SnapTrax




GMT 64
SnapTrax Plus



NSF 77
SafeStep Plus



GM 57
Frontrunner Plus & LP
Flooring Solutions For Every Environment

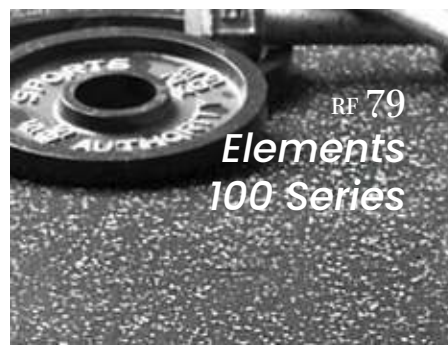

RF 79
*Elements
100 Series*



Table of Contents

Company History	4
LEED Credits	5
Zone Systems	6 – 7
Sheet/ Roll Goods	8
Carpet Tile	20
Custom Logo Matting	37
Commercial Mats	45
Luxury Vinyl Planks & Tile	48
Grid Entry Systems	55
Industrial & Anti-Fatigue Mats	68
Non-Slip Flooring	76
Recycled Rubber Flooring	78
Adhesives & Accessories	87
Metal Transitions	90
General Maintenance	93
Index	95

Icon Legend



Product is available for Indoor & Outdoor use.



Available for Custom "Logo" Matting



Castor-Friendly (EN 985)



Product is available for Indoor use only.



Sheet/Roll Good



Fire Resistant (ASTM D2859)



CRI Green Label Plus. Certified - Indoor Air Quality.



Interlocking Tile



Meets IBM/ICL industry standards for static electricity (prEN 1815).



Zone reference indicated in the Entrance Defense System. (Page 6-7)



Square Tile



Colorfast tested against light (ISO 105 BO2 1994) and water (EN ISO 105 EO1 1996).



Product is FloorScore Certified



Produced & Distributed in the United States of America.



Commercially tested for durability in office environments.



LVT 1x Protective wear layer coating



Available with TacFast™ Backing.



Acoustic-Absorption Qualities

Our Legacy in Flooring Innovation

Hailing from France and the Netherlands, van Gelder Inc.'s founders Mariette and Sal van Gelder, brought with them a new perspective of flooring that had yet to catch on in the Americas.

They seized the opportunity to change the landscape of commercial flooring in 1978, by offering world-class needlepunch products designed to perform in areas beyond what was considered possible. In 2004, the Portico Systems brand was created to help expand vG's footprint across the United States, working directly with national retailers.

van Gelder Inc. prides itself in creating the highest-quality needle punch flooring in the industry, along with a growing selection of flooring solutions for every environment. Our cutting-edge technology combined with personal, concierge service allows vG to provide unrivaled flexibility and industry-beating lead times. Plus, with our ever-improving selection, most every product meets or exceeds ECO and LEED recommendations.

With the second generation and partnership running the company, we strive to continue the legacy that was started over 4 decades ago. We remain true to our roots, morals, and are inspired by our loyal and talented employees, customers and vendors on a daily basis. Always first class since 1978.



Understanding LEED Credits

What is LEED?

Developed by the U.S. Green Building Council, the Leadership in Environmental and Energy Design (LEED) rating system encompasses all aspects of building design, rewarding structures that maximize energy efficiency and minimize their impact on the environment through a number of techniques and materials.

How can vG help with LEED credits?

We at van Gelder Inc. are dedicated to help architects and designers get the most LEED credits possible with our wide variety of floor covering solutions. Each product lists any potential credits in its technical specifications, taking the guesswork out of the process.

Our experts are available to help find the best commercial flooring solutions for any environment.

Contact us today to get started:

1+706 602 4186 • sales@vangelder-inc.com

Understanding LEED credits:

Credits made possible with our products usually fall into two categories: Materials Reuse (MR) and Indoor Environmental Quality (IEQ) credits.

MR CREDITS:

CREDIT 4 (1-2 POINTS): Percentage of Recycled Content
Usually between 10%-20%; calculated by dollar value.

IEQ CREDITS:

CREDIT 4.1 (1 POINT): Low-Emitting Adhesives
Indicates low levels of VOCs (Volatile Organic Compounds) are emitted by adhesives or sealants used in installation.

CREDIT 4.3 (1 POINT): Low-Emitting Materials
Indicates low levels of VOCs (Volatile Organic Compounds) are emitted by materials in floor covering. Also indicates CRI Green Label Plus certification.

CREDIT 5 (1 POINT): Indoor Chemical & Pollutant Source Control
When installed in a semi-permanent fashion with at least 10 ft. of walk-off area, product can prevent outside pollutants from entering a building.

1-2-3

ZONES

ENTRANCE DEFENSE

Keep up to 80% of dirt and grime from entering your building while minimizing slip & fall risks. Entrance Defense will also reduce maintenance costs, and improve indoor air quality.

ZONE

1

SCRAPE

OUTSIDE

TRAPS EXCESS DIRT & DEBRIS

According to TRSA research, more than 80% of dust, dirt and grime in commercial buildings is tracked in from entering foot traffic.

- **Grid Matting (pg. 51)**
- **Commercial Mats (pg. 45)**
- **Roll/Sheet Goods (pg. 8)**

ZONE

2

CLEAN

VESTIBULE/AIRLOCK

SCRUBS ENTERING FOOT TRAFFIC

One square yard of commercial carpeting can accumulate a pound of dirt in a week (two pounds in wet weather).

- **Grid Matting (pg. 51)**
- **Carpet Tiles (pg. 20)**
- **Roll/Sheet Goods (pg. 8)**

ZONE

3

DRY

INSIDE

REMOVES MOISTURE OR HELPS PREVENT SLIPS & FALLS.

ISSA studies show that a pound of dirt is left in commercial carpet for every 800 people. The cost of removing that pound of dirt can cost upwards of \$700.

- **Roll/Sheet Goods (pg. 8)**
 - **Carpet Tiles (pg. 20)**
-
- **Luxury Vinyl Planks & Tile (pg. 45)**
 - **Non-Slip Flooring (pg. 72)**

FIRST THINGS FIRST INSTALL THE CORRECT FLOORING


Install high performance flooring that matches the correct traffic frequency of your facility. Using matting as your building's first line of defense against dirt and debris, is a simply effective way to cut down on cleaning and maintenance. The best approach to prevent unnecessary repair costs. Working with a reputable company that can ensure each detail, from measuring to installation, makes it even more inviting. Check out the high quality commercial flooring by vG.

3 ZONE 3 BREAK ROOMS, BACK OF HOUSE AREAS, OFFICES, STORAGE FACILITIES

We isolate and provide solutions for zone 3 areas that don't get as much attention as common spaces. There is no reason to hide or overlook these rooms as our interior finishes are made to last a very long time without sacrificing looks. These areas can become more enjoyable to be within given the right flooring option.

2+3 ZONE 2+3 LOBBY & MAIN FLOOR

A lobby and common area will receive the most amount of traffic in an interior space. For industrial and commercial facilities it's extremely important to use a product that has the rating to handle these tough environments. All of the floors we recommend/offer take durability and longevity in mind while maintaining an aesthetically pleasing appeal.

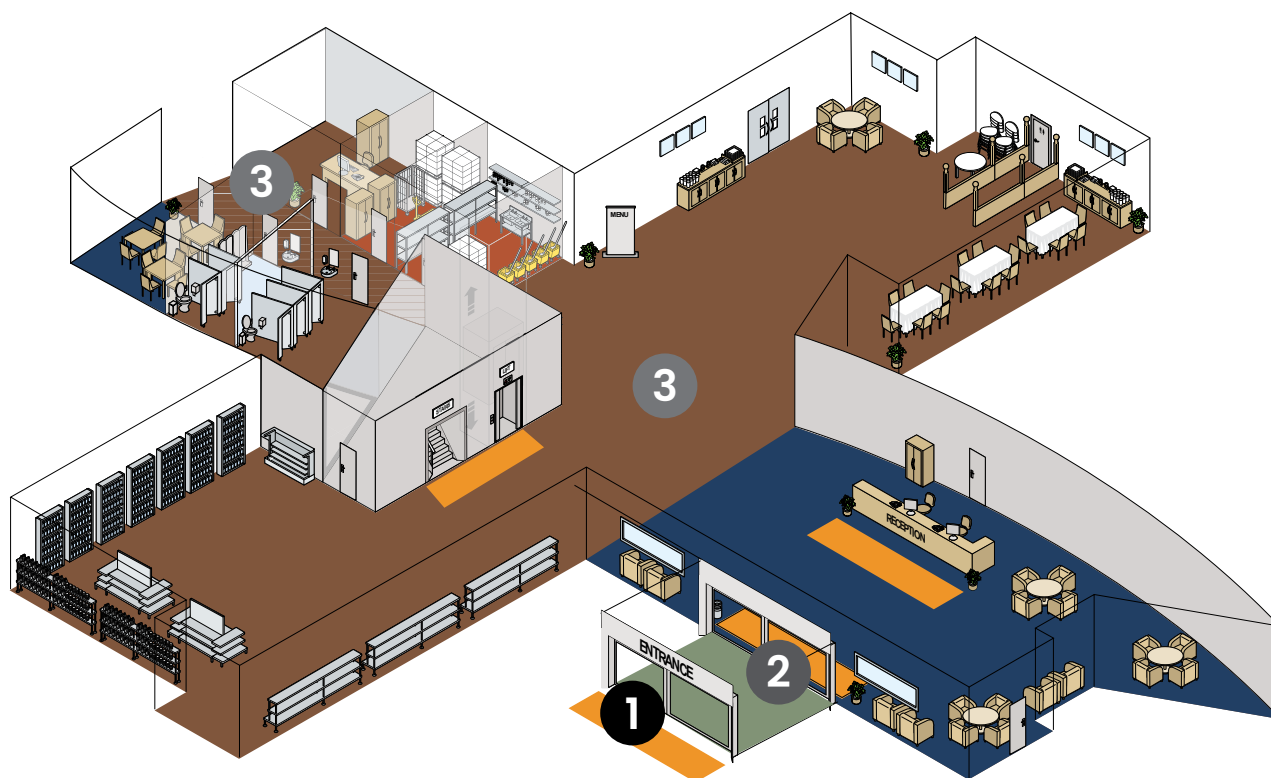

1 ENTRYWAYS

Higher quality entrance flooring can remove more dirt and debris, decrease cleaning times, increase indoor air quality, and provide a more robust solution that can affect the overall safety of your facility. Creating a positive impression for your guests by using indoor/outdoor products in this area is key. With so many options available on the market, here are a few key pointers to know how to identify high quality entrance matting. (See opposite page 6).

2 ZONE 2 VESTIBULE/AIRLOCK

It can cost hundreds of dollars to clean debris tracked in by people entering your facility. While some products tout that entrance flooring should be installed exactly perpendicular to oncoming foot traffic, the truth is that people walk in many differing paths. Installing a high-performance roll good wall to wall, carpet tile 1/4 turned, or having a crisscross grid will help your vestibules/airlocks look great with low effort for years to come. This not only decreases slips and falls, but also provides the highest capture of dirt and debris from entering your facility.

Sheet/Roll Carpeting

Solutions from high-performance needlepunched to striking nylons

Wall to wall, corner to corner, your space needs to perform for you. van Gelder's line of beautiful, high-performance carpeting features a wide array of colors and styles to help you achieve the look and feel you desire. Plus, with vG's service, selecting and installing the right carpet for the job is easier than ever.



ATLAS

44 OZ. CORDUROY RIB • INDOOR/
OUTDOOR CARPET



Classic style with legendary resilience, the stain and crush-resistant. Atlas offers the performance needed for high-traffic areas.

SPECIFICATIONS

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Corduroy Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA [®] polypropylene
Backing:	Premium Composite Rubber
Pile Height (± 0.5mm):	0.18"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	44 oz./sy
Total Weight (± 7.5%):	65 oz./sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5



1. Sterling 2344

2. Charcoal 1198

3. Black Shadow 2343



31. Gris/Charcoal 2098 (PMS Black 6 C)

Timeless style, incredible flexibility, and unwavering performance: our popular Champion Super Nop is perfect for most any application.

CHAMPION SUPER NOP

54 OZ. BERBER • INDOOR/OUTDOOR CARPET



SPECIFICATIONS

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Hobnail (berber) pattern
Fiber:	100% Solution-dyed UV Stabilized ASOTA* polypropylene
Backing:	Premium composite rubber
Pile Height (± 0.5mm):	0.25"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	54 oz./sy
Total Weight (± 7.5%):	78 oz./sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5



1. Bright Red 3014 (PMS 192 C)	11. Sky Blue 5149 (PMS 291 C)	21. Zinc 7006 (PMS 140 C)	31. Gris/Charcoal 2098 (PMS Black 6 C)
2. Solid Crimson 3031 (PMS 484 C)	12. Royal Blue 5182 (PMS 285 C)	22. Taupe 2345 (PMS 408 C)	32. Teak 7185 (PMS 412 C)
3. Burgundy 3036 (PMS 209 C)	13. Turquoise 6096 (PMS 325 C)	23. Autumn 2048 (PMS 404 C)	33. Sterling 2344 (PMS 430 C)
4. Garnet 3138 (PMS 7645 C)	14. Verde Green 6043 (PMS 350 C)	24. Hunter Green 6022 (PMS 342 C)	34. Black Shadow 2343 (PMS Black 7 C)
5. Pink 3091 (PMS 1905 C)	15. Steel Blue 5157 (PMS 534 C)	25. Loden 6081 (PMS Black 5 C)	35. Solid Black 2000 (PMS Black)
6. Cardinal Red 3353 (PMS 7623 C)	16. Midnight Blue 5154 (PMS 7546 C)	26. Sand 1064 (PMS 4665 C)	36. White 1000 (PMS White)
7. Orange 3018 (PMS 144 C)	17. Prism 5155 (PMS 295 C)	27. Coir/Natural 1099 (PMS 467 C)	37. Carbon 9859 (PMS Cool Grey 11 C)
8. Kelly Green 6042 (PMS 356 C)	18. Azure 5181 (PMS 540 C)	28. Rosewood 7178 (PMS 7589 C)	38. Off White 1001 (PMS Warm Grey 1 C)
9. Gold 1039 (PMS 7563 C)	19. Purple 3090 (PANTONE™ Med. Purple)	29. Chocolate 7097 (PMS 7596 C)	
10. Yellow 1025 (PMS 121 C)	20. Natural Beige 1153 (PMS 7530 C)	30. Walnut 7068 (PMS 7519 C)	

NOTE: PMS colors are subjective and listed for approximation only; they are not necessarily a match with actual product.

SUPERIOR NOP

60 OZ. BERBER • INDOOR/OUTDOOR CARPET



This next-level carpeting offers classic style with unrivaled performance and is ideal for the most high-traffic of areas.

SPECIFICATIONS


Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Hobnail (berber) Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA [®] polypropylene
Backing:	Vinyl Backed
Pile Height (± 0.5mm):	0.35"
Total Height (± 7.5%):	0.57"
Pile Weight (± 7.5%):	60 oz./sy
Total Weight (± 7.5%):	90 oz./sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5

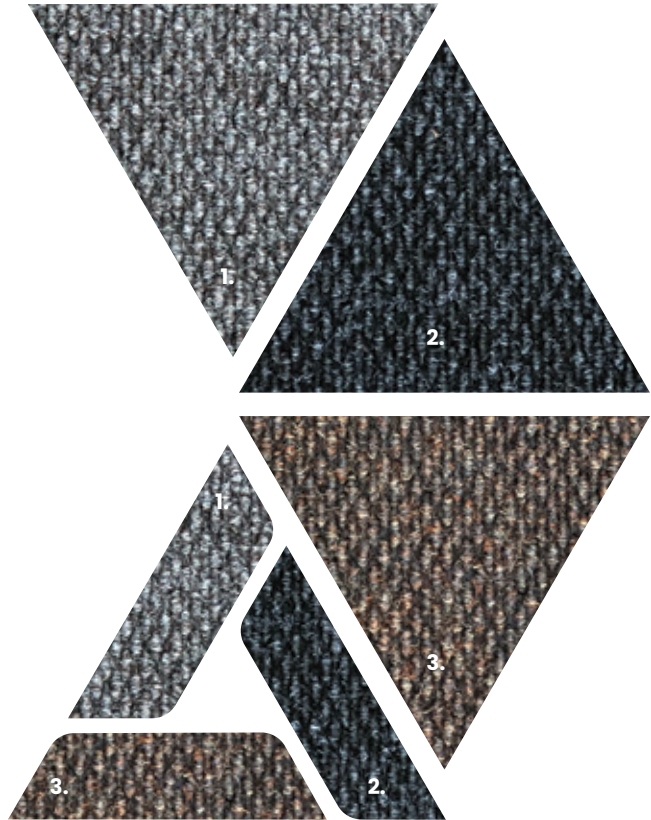

1. Stone 2099

2. Gris/Charcoal 2098

3. Nugget 2097



COUGAR

44 OZ. DOUBLE-RIB • INDOOR/OUTDOOR
CARPET



Rich and dense all-weather fibers come together to provide incredible performance in a uniquely patterned carpet.

SPECIFICATIONS


Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Double-Rib Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA* polypropylene
Backing:	Premium Composite Rubber
Pile Height (± 0.5mm):	0.18"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	44 oz./sy
Total Weight (± 7.5%):	65 oz./sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5

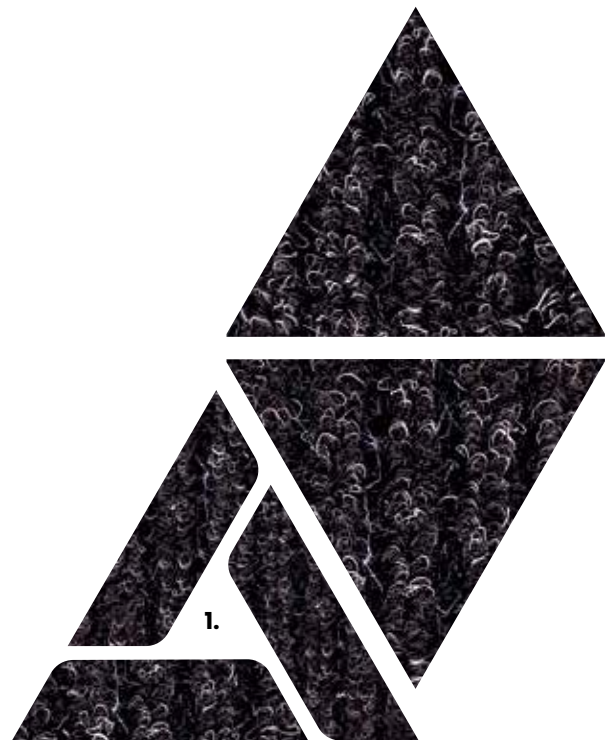

1. Charcoal 2198 Only

EAGLE

44 OZ. BERBER • INDOOR/OUTDOOR CARPET




Versatile and uncompromising, van Gelder's Eagle offers signature performance in medium to high-traffic areas.

SPECIFICATIONS


Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Hobnail (berber) Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA* polypropylene
Backing:	Premium Composite Rubber
Pile Height (± 0.5mm):	0.18"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	44 oz./sy
Total Weight (± 7.5%):	65 oz./sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

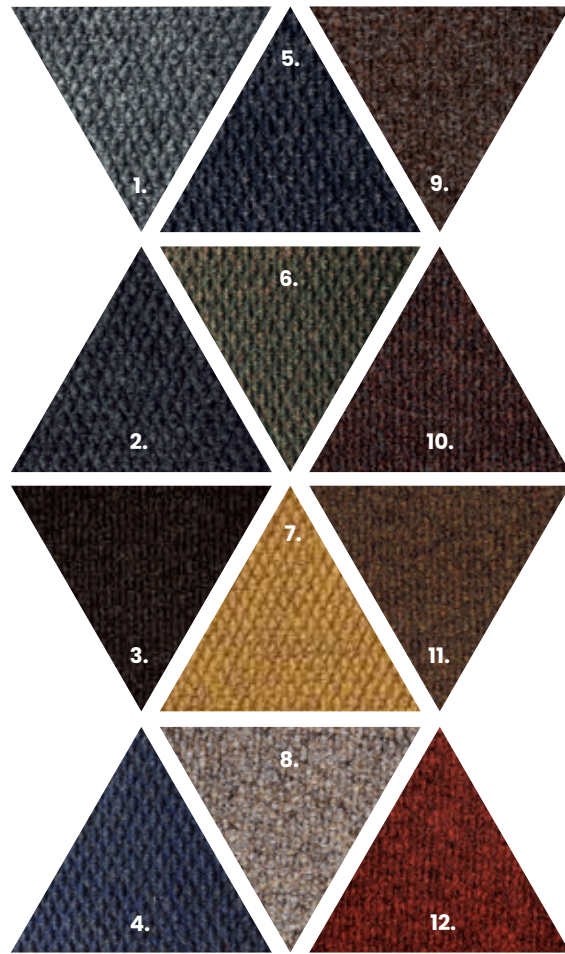

1. Sterling 2344	5. Midnight Blue 5154	9. Chocolate 912
2. Anthracite 907	6. Aspen 6265	10. Bordeaux 7178
3. Black Shadow 2343	7. Sisal 1099	11. Harvest 1244
4. Azure 5181	8. Beige 918	12. Cardinal Red 3353

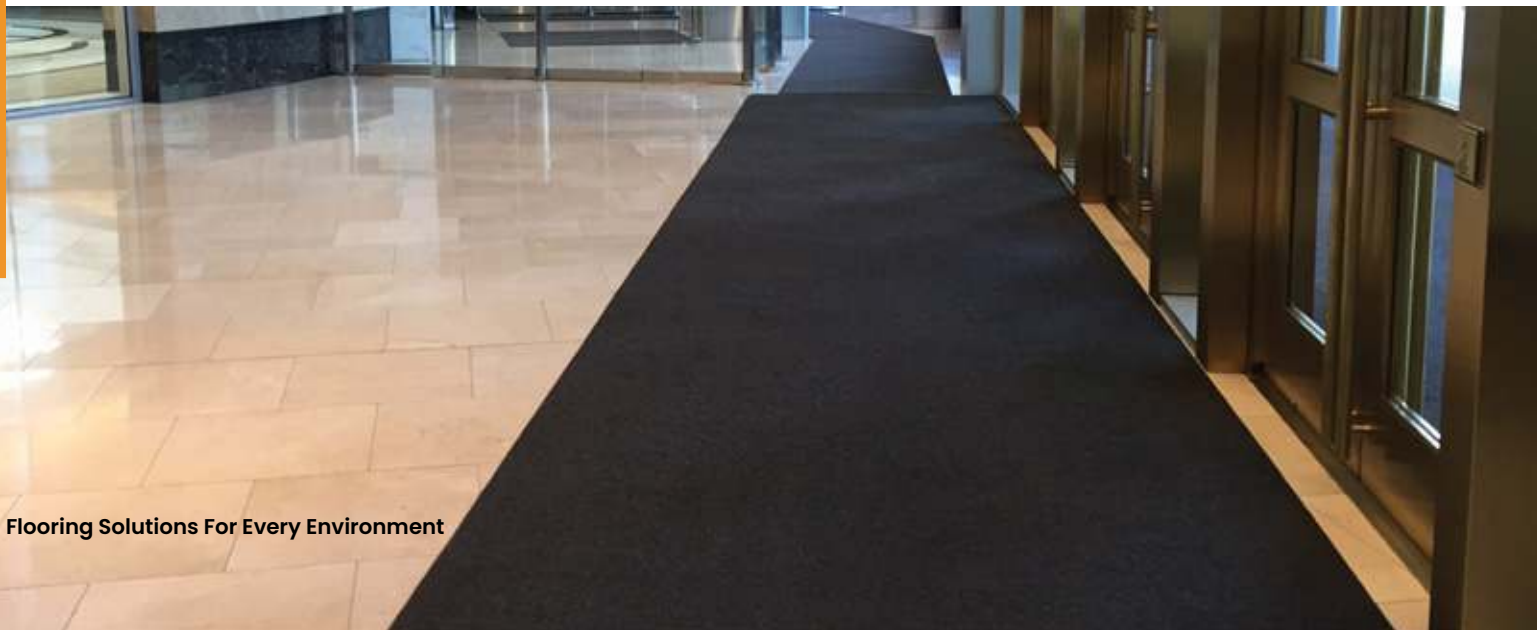

FENWAY NOP

37 OZ. BERBER • INDOOR/OUTDOOR CARPET



Classic berber style, Fenway Nop performance is great for medium-traffic areas.

SPECIFICATIONS


Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Hobnail (berber) Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA* polypropylene
Backing:	Premium Composite Rubber
Pile Height (± 0.5mm):	0.125"
Total Height (± 7.5%):	0.375"
Pile Weight (± 7.5%):	37 oz/sy
Total Weight (± 7.5%):	64 oz/sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5

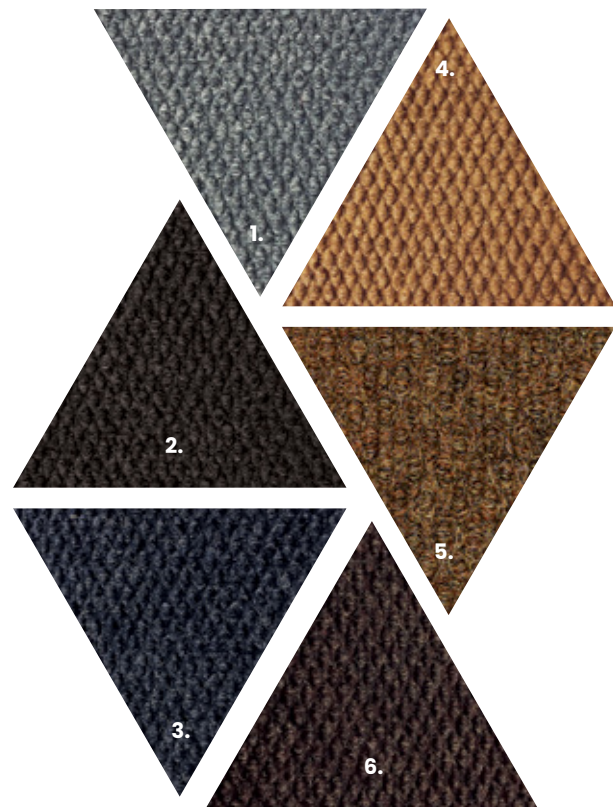

- 1. Sterling FN05
- 2. Charcoal FN19
- 3. Steel Blue FN28

- 4. Sisal FN199
- 5. Zinc FN13
- 6. Walnut FN21

SYNTHETIC COCO

44 OZ. NON-WOVEN INDOOR/OUTDOOR
POLYPROPYLENE



The best of two worlds, Synthetic Coco offers the lush, natural look and feel of coconut coir fibers without compromise (or shedding).

SPECIFICATIONS


Manufacturing Process:	Non-woven
Surface Aspect:	Non-Directional Smooth/Velour
Fiber:	100% Solution-dyed UV stabilized polypropylene
Backing:	Safety Track
Pile Height (± 0.5mm):	0.422"
Total Height (± 7.5%):	0.625"
Pile Weight (± 7.5%):	44 oz./sy
Total Weight (± 7.5%):	120 oz./sy
Sheet/Roll Width (± 2%):	67"

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5

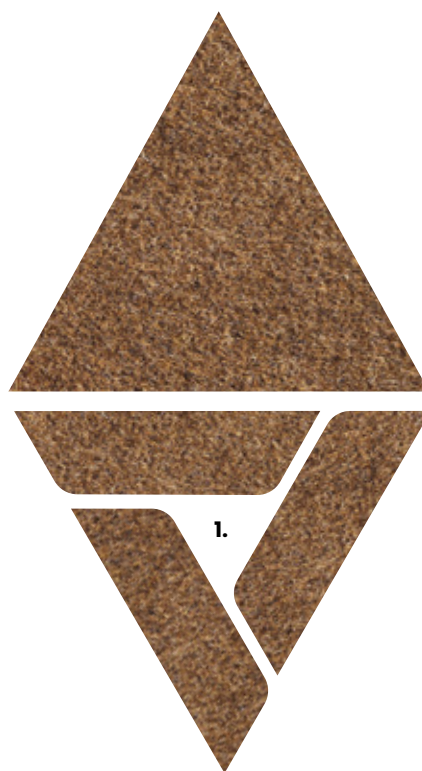

1. Natural SYN0111

NATURAL COCO/COIR

60 OZ. NATURAL FIBERS INDOOR MATTING




Made with natural coconut/coir fibers, this venerable matting provides an unparalleled premium, natural look and feel for indoor applications.

SPECIFICATIONS

Manufacturing Process:	Fusion Bonded
Surface Aspect:	Non-Directional Smooth/Velour
Fiber:	Natural Coconut Fibers (Coir)
Backing:	Vinyl
Pile Height (± 0.5mm):	0.422"
Total Height (± 7.5%):	0.625"
Pile Weight (± 7.5%):	60 oz./sy
Total Weight (± 7.5%):	166 oz./sy
Sheet/Roll Width (± 2%):	6'7"

FLAMMABILITY RATING

Radiant Panel (ASTM E648 / DIN 4102)	Class II
LEED-NC	MR Credit 4 IEQ Credits 4.1, 5

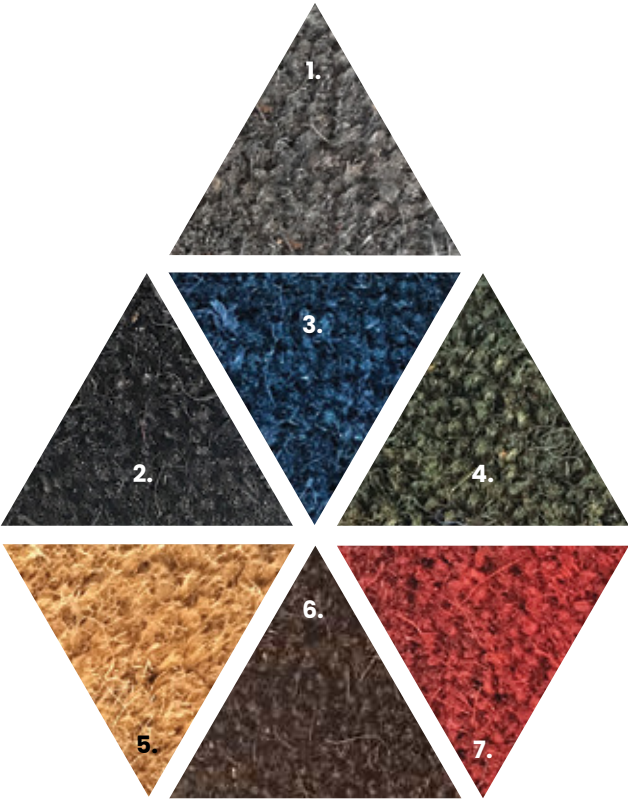

- | | | |
|---------------|-----------------|-------------|
| 1. Grey NC01 | 4. Green NC10 | 7. Red NC06 |
| 2. Black NC02 | 5. Natural NC04 | |
| 3. Blue NC03 | 6. Brown NC05 | |



Nylons

Make any space stand out with a clean, sophisticated look & style.

WINDSOR

30 OZ. DESIGNER STRIAE NYLON CARPET



This signature nylon product offers a premium, naturally inspired striae pattern that gives any space a sense of motion and texture without sacrificing performance.

SPECIFICATIONS


Manufacturing Process:	Tufted
Surface Aspect:	Designer Striae Pattern
Fiber:	100% PA6 Space Dyed Nylon
Backing:	Premium Composite Rubber
Pile Height (±0.5mm):	0.275"
Total Height (± 7.5%):	0.375"
Pile Weight (± 7.5%):	30 oz./sy
Total Weight (± 7.5%):	70 oz./sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"

FLAMMABILITY RATING

Radiant Panel (ASTM E648 / DIN 4102)	Class I
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 5

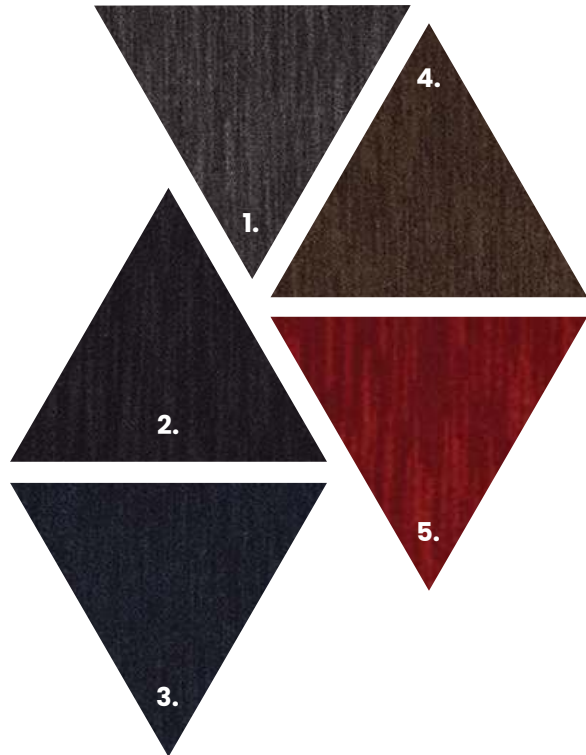

1. Dark Grey

2. Charcoal Black

3. Navy Blue

4. Taupe

5. Red

Sheet/Roll Good | Windsor | Zones 2-3

CLASS
1

Designers'
Choice

1+706 602 4186 | www.vangelder-inc.com

Carpet Tiles

Flexible Function and style in each square.

Flexibility, visual intrigue and ease of maintenance are a few key advantages of vGs' line of high-performance carpet tiles. From traditional glue-down solutions to the added flexibility of TacFast™, each tile is made to withstand the toughest conditions while offering easy modularity.

CHAMPION SUPER NOP

54 OZ. BERBER CARPET TILE



Timeless style, incredible flexibility, and unwavering performance our popular Champion Super Nop is perfect for most any application.


SPECIFICATIONS

Manufacturing Process:	Non-woven/ Needlepunched
Surface Aspect:	Hobnail (berber) Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA® polypropylene
Backing:	Premium (ECO) Bitumen
Pile Height (± 0.5mm):	0.25"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	54 oz./sy
Total Weight (± 7.5%):	169 oz./sy
Tile Size:	19.69" x 19.69" (±2%)
Packaging:	12 tiles/ ctn. (32.5 sq. ft.)



Also available in Roll Goods. See pages 10-11.

FLAMMABILITY RATING

Radiant Panel (ASTM E648)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

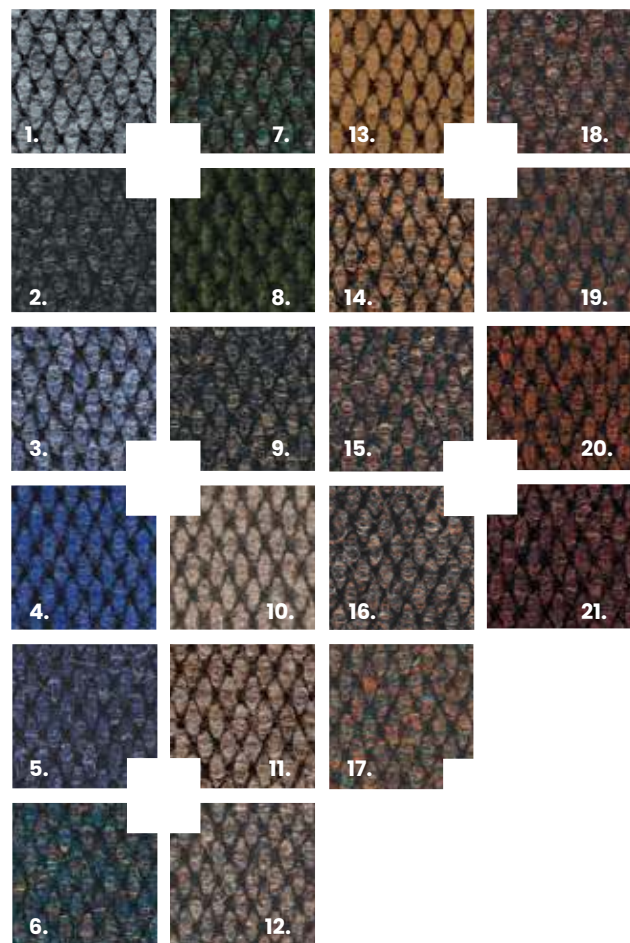

1. Sterling 2344	8. Verde Green 6043	15. Walnut 7068
2. Gris/ Charcoal 2098	9. Black Shadow 2343	16. Teak 7185
3. Steel Blue 5157	10. Taupe 2345	17. Loden 6081
4. Azure 5181	11. Natural Beige 1153	18. Chocolate 7097
5. Midnight Blue 5154	12. Autumn 2048	19. Rosewood 7178
6. Prism 5155	13. Coir/ Natural 1099	20. Cardinal Red 3353
7. Hunter Green 6022	14. Zinc 7006	21. Garnet 3138

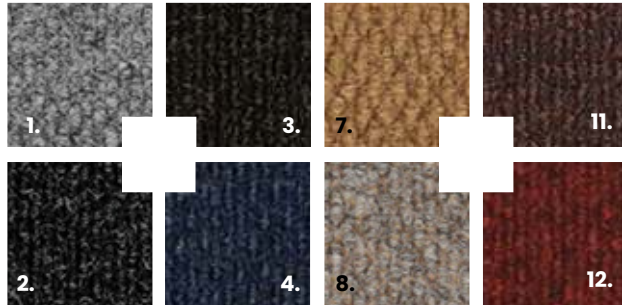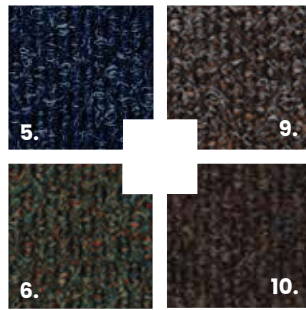

- | | | |
|----------------------|----------------------|-----------------------|
| 1. Sterling 2344 | 5. Midnight Sky 5154 | 9. Cocoa 1301 |
| 2. Anthracite 1303 | 6. Aspen 6265 | 10. Harvest 1244 |
| 3. Black Shadow 2343 | 7. Sisal 1099 | 11. Bordeaux 7178 |
| 4. Azure 5181 | 8. Brown Sugar 1353 | 12. Cardinal Red 1305 |

CHAMPION XP

44 OZ. BERBER CARPET TILE



SPECIFICATIONS

Manufacturing Process:	Non-woven/ Needle punched
Surface Aspect:	Hobnail (berber) Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA® polypropylene
Backing:	Premium (ECO) Bitumen
Pile Height (± 0.5mm):	0.20"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	44 oz./sy
Total Weight (± 7.5%):	172 oz./sy
Tile Size:	19.69" x 19.69" (± 2%)
Packaging:	12 Tiles / ctn. (32.5 sq. ft.)

FLAMMABILITY RATING

Radiant Panel (ASTM E648 / DIN 4102)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

CHAMPION LP

24 OZ. BERBER CARPET TILE




SPECIFICATIONS

Manufacturing Process:	Non-woven/needle punched
Surface Aspect:	Hobnail (berber) pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA® polypropylene
Backing:	Premium (eco) Bitumen
Pile Height (± 0.5mm):	0.30"
Total Height (± 7.5%):	0.34"
Pile Weight (± 7.5%):	24 oz./sy
Total Weight (± 7.5%):	114 oz./sy
Tile Size:	19.69" x 19.69" (± 2%)
Packaging:	12 tiles/ctn. (32.5 sq. ft.)

FLAMMABILITY RATING

Radiant Panel (ASTM E648)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

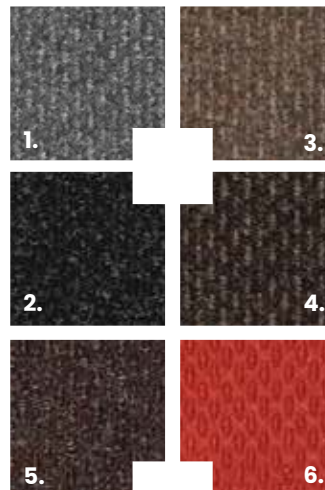


1. Smokey Grey 1531
2. Marble 1593
3. Beige 1153
4. Khaki 1006
5. Chocolate 1097
6. Solid Crimson 3031



Great Look
& Function

DOMINATOR

60 OZ. DIAGONAL-PATTERNED CARPET TILE




Inviting and resilient design for long-term wear, Dominator carpet tiles are engineered to withstand the constant foot and cart traffic found in many retail environments.

SPECIFICATIONS

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Diagonal Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA® polypropylene
Backing:	Premium (eco) Bitumen or TacFast™ (See Pg. 29)
Pile Height (± 0.5mm):	0.375"
Total Height (± 7.5%):	0.50"
Pile Weight (± 7.5%):	60 oz./sy
Total Weight (± 7.5%):	169 oz./sy
Tile Size:	19.69" x 19.69" (± 2%)
Packaging:	12 tiles/ctn. (32.5 sq. ft.)


FLAMMABILITY RATING

Radiant Panel (ASTM E648)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

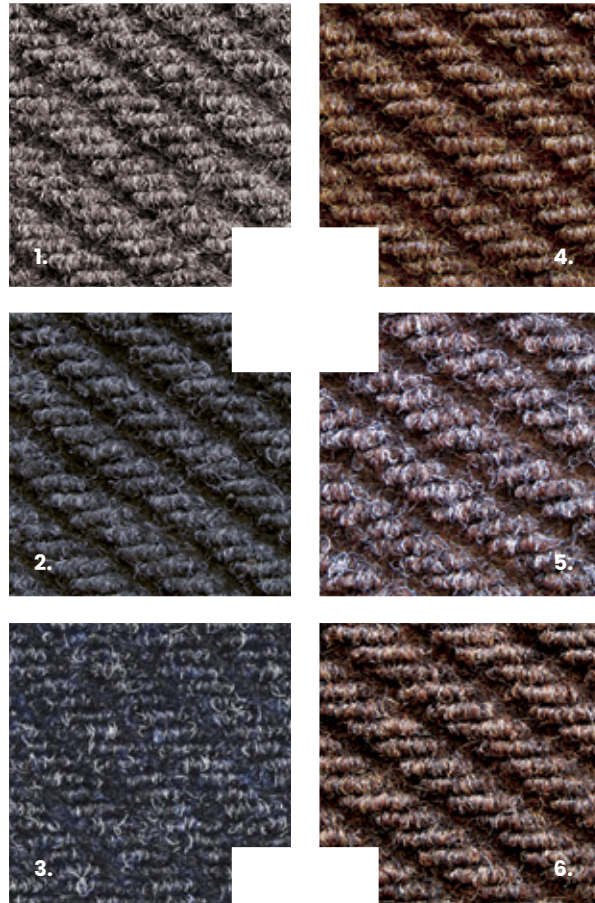

1. Mid Grey 112
2. Anthracite 93
3. Indigo Blue 90


4. Pebble 114
5. Heath 115
6. Walnut 113

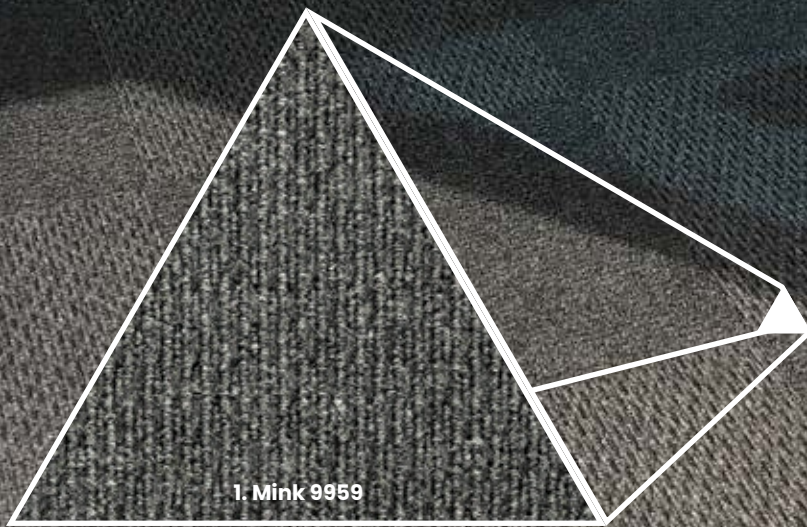

Elevates any space with its unique look and functionality, Diplomat carpet tiles are the perfect solution for entryways or workspaces in retail spaces.

DIPLOMAT

60 OZ. HIGH-LOW STRUCTURED LOOP
CARPET TILE




SPECIFICATIONS

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	High-Low Structured Loop Dirt Pocket Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA® polypropylene
Backing:	Premium (eco) Bitumen or TacFast™ (See Pg. 29)
Pile Height (± 0.5mm):	0.33"
Pocket Height (± 7.5%):	0.16"
Total Height (± 7.5%):	0.44"
Pile Weight (± 7.5%):	60 oz./sy
Total Weight (± 7.5%):	170 oz./sy
Tile Size:	19.69" x 19.69" (± 2%)
Packaging:	12 tiles/ctn. (32.5 sq. ft.)

FLAMMABILITY RATING

Radiant Panel (ASTM E648 / DIN 4102)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

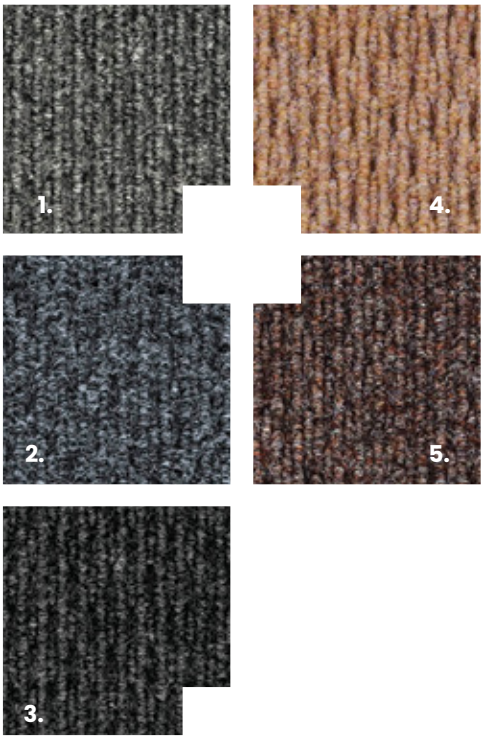

- 1. Mink 9959*
- 2. Carbon 9859
- 3. Smoke 9459
- 4. Tan 9259*
- 5. Heath 9259

Note: color with * is only available in TacFast™.

DOMINATOR LP

39 OZ. DIAGONAL-PATTERNED CARPET TILE




A lower-profile solution, Dominator LP offers the full performance of Dominator in a lighter, thinner tile.

SPECIFICATIONS

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Diagonal Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA* polypropylene
Backing:	Premium (ECO) Bitumen
Pile Height ($\pm 0.5\text{mm}$):	0.25"
Total Height ($\pm 7.5\%$):	0.37"
Pile Weight ($\pm 7.5\%$):	39 oz./sy
Total Weight ($\pm 7.5\%$):	142 oz./sy
Tile Size:	19.69" x 19.69" ($\pm 2\%$)
Packaging:	20 tiles/ctn. (54.18 sq. ft.)

FLAMMABILITY RATING

Radiant Panel (ASTM E648)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

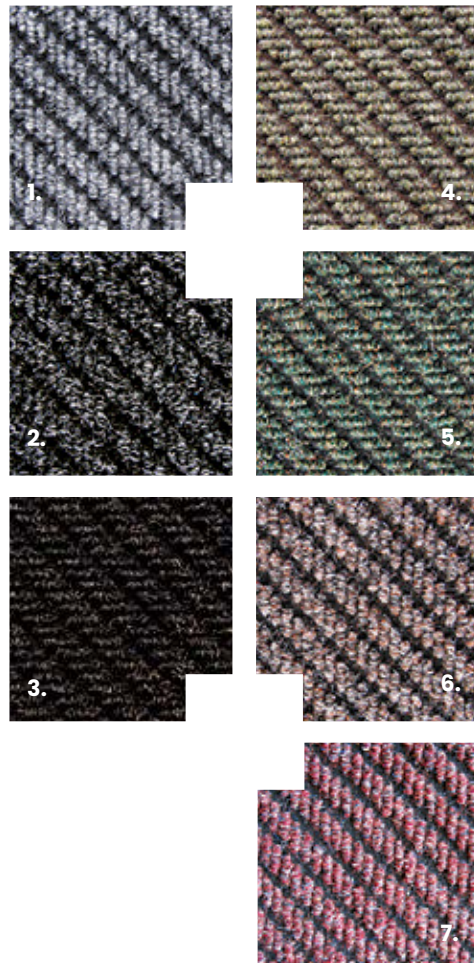

1. Mid Grey 1512

2. Anthracite 1593

3. Black Shadow 2343

4. Olive 1594

5. Autumn Green 1595

6. Pebble 1514

7. Cranberry 1598

Ribbed Tiles

Classic Style & Performance.

ATLAS PLUS

60 OZ. CORDUROY RIB CARPET TILE



The ultimate ribbed tile, Atlas Plus provides unwavering durability in any high-traffic space.

SPECIFICATIONS


Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Corduroy Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA* polypropylene
Backing:	Premium (eco) Bitumen or TacFast™ (See Pg. 29)
Pile Height (± 0.5mm):	0.375"
Total Height (± 7.5%):	0.50"
Pile Weight (± 7.5%):	60 oz/sy
Total Weight (± 7.5%):	170 oz/sy
Tile Size:	19.69" x 19.69" (± 2%)
Packaging:	12 tiles/ctn. (32.5 sq. ft.)

FLAMMABILITY RATING

Radiant Panel (ASTM E648)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5

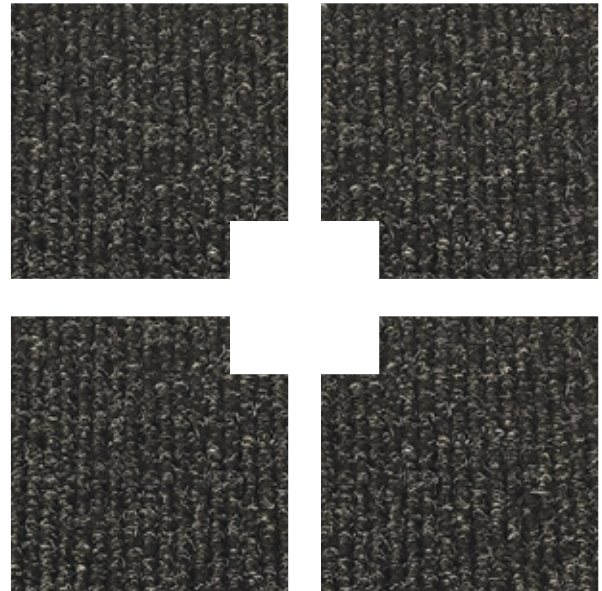

1. Gris/ Charcoal 2098 - Bitumen Backing Only

TacFast™

MODULAR CARPET TILE INSTALLATION SYSTEM

Inspired by hook-and-loop fasteners, the TacFast™ Modular Carpet Tile System makes carpet tiles infinitely more flexible. Quickly and easily replace stained tiles, or update the look and feel of your space for your needs as they change. TacFast™ makes it possible.

PRODUCT HIGHLIGHTS:

- *Designed to last for multiple changes without extra cost or mess.*
- *Easy, simple removal and installation for added flexibility.*
- *Painless access to the sub-floor for easy cleaning and maintenance*
- *Eliminates liquid adhesives, resulting in less VOCs and improved indoor air quality.*




TacFast Tile Backing

TacFast™ Tape Layout

SENATOR SOFTSTEP

28 OZ. NEEDLE-FELT ANTI-FATIGUE CARPET TILE




A favorite in pharmacies, these anti-fatigue tiles pull double duty by offering the warmth and resilience of velour carpeting with the long-term support of anti-fatigue matting.

SPECIFICATIONS

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Dense Velour Pattern
Fiber:	100% Polyester Non-woven Dilour with coating
Primary Backing:	Closed-Cell Expanded PVC
Cushion Density:	14 lbs/cu. ft. nominal
Pile Height (± 0.5mm):	0.24"
Total Height (± 7.5%):	0.62"
Pile Weight (± 7.5%):	28 oz./sy
Total Weight (± 7.5%):	359 oz./sy
Tile Size:	18" x 18" or 18" x 36" (± 2%)
Packaging:	10 tiles/ctn. (22.5 sq. ft. or 45 sq. ft.)

FLAMMABILITY RATING

Radiant Panel (ASTM E648)	Class I
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 4.3, 5

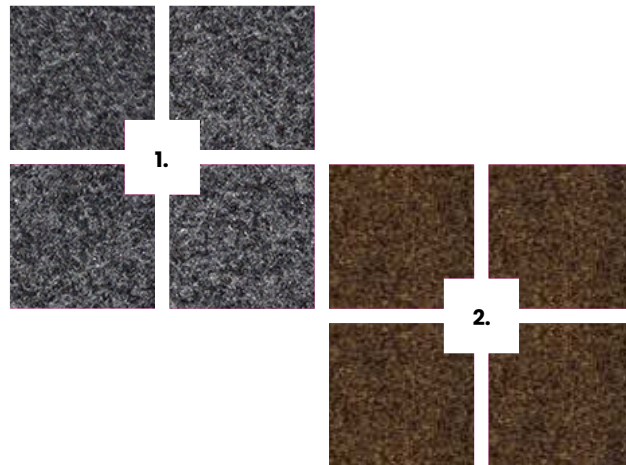

1. Charcoal

2. Brown



3/8" Thick Foam





SAFEGUARD GIANT TILES

NON-WOVEN POLYESTER CARPET TILE



Safeguard Giant Tiles are aesthetically pleasing and used to transform gymnasiums while providing unmatched protection.

- Temporary flooring
- No tools, tape or glue needed for installation
- Quick and easy setup and breakdown
- Industrial strength reusable tiles
- Lightweight
- Slip-resistant and flexible tiles


SPECIFICATIONS

Manufacturing Process:	Non-Woven
Fiber:	100% Polyester Non-woven Flat
Primary Backing:	Sure Back Coating
Pile Height (± 0.5mm):	0.228"
Total Weight (± 7.5%):	57.6 oz/sy
Tile Size (± 2%):	39" x 78" (1m x 2m)

FLAMMABILITY RATING

Radiant Panel (ASTM E648)	Class II
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC MR Credit 4 | IEQ Credits 4.1, 4.3, 5

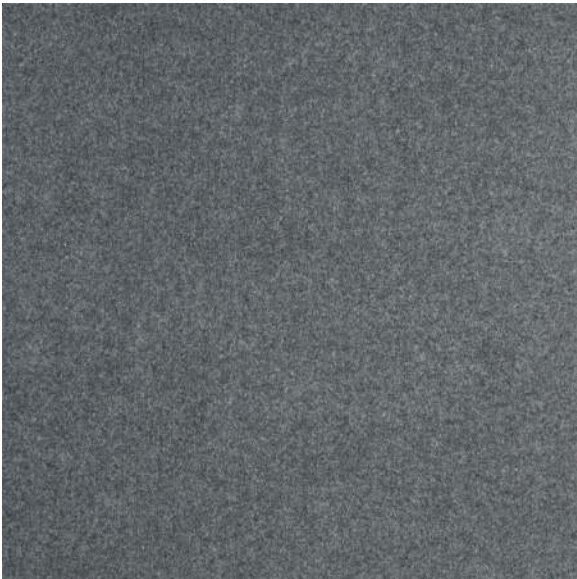

1. Heather Grey

WINDSOR

30 OZ. DESIGNER STRIAE NYLON CARPET TILE



This signature nylon product offers a premium, naturally inspired striae pattern that gives any space a sense of motion and texture without sacrificing performance.


SPECIFICATIONS

Manufacturing Process:	Tufted
Surface Aspect:	Designer Striae Pattern
Fiber:	100% PA6 Space Dyed Nylon
Backing:	Premium (eco) Bitumen
Pile Height (± 0.5mm):	0.275"
Total Height (± 7.5%):	0.375"
Pile Weight (± 7.5%):	30 oz./sy
Total Weight (± 7.5%):	150 oz./sy
Tile Size:	19.69" x 19.69" (± 2%)
Packaging:	20 tiles/ctn. (54.18 sq. ft.)

*Also available in Roll Goods (see page 19)

FLAMMABILITY RATING

Radiant Panel (ASTM E648 / DIN 4102)	Class I
Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC	MR Credit 4 IEQ Credits 4.1, 5

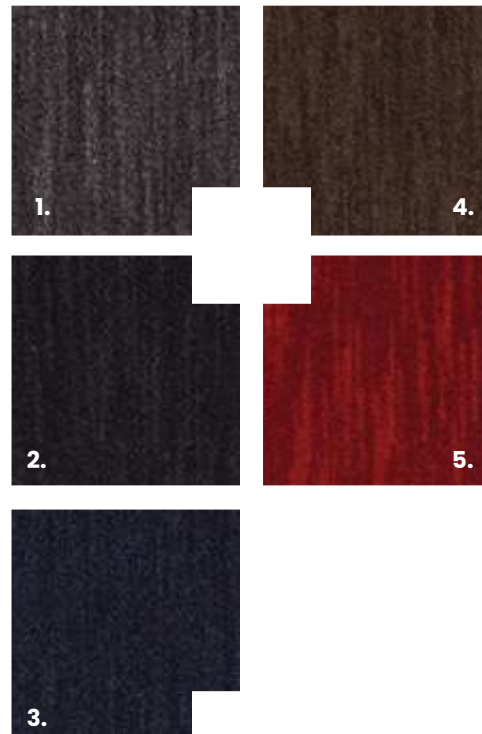

- 1. Dark Grey
- 2. Charcoal Black
- 3. Navy Blue

- 4. Taupe
- 5. Red

CROSS GUARD

20 OZ. PATTERNED SCROLL CARPET TILE




Where two weathered avenues converge and offer a pathway forward lies the vision behind Cross Guard. Intersecting lines layered over a mottled base of neutral earth tones softly reflect the symmetry and imperfect beauty of urban connectivity.

SPECIFICATIONS

Construction	Patterned Scroll
Standard Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	10141 oz./y3 (376.03 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Total Thickness (nominal average)	0.245 inches
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Special Treatments	ProTex® Soil Release
Optional Backings	Nexus® Cushion
Standard Adhesive	Commercial on Premium Modular & LVT Adhesive

ENVIRONMENTAL SPECIFICATIONS & TESTS

SCAS / NSF 140	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450.0 flaming (ASTM E 662)
Static Test	Less than 3.0 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Light fastness	Yes

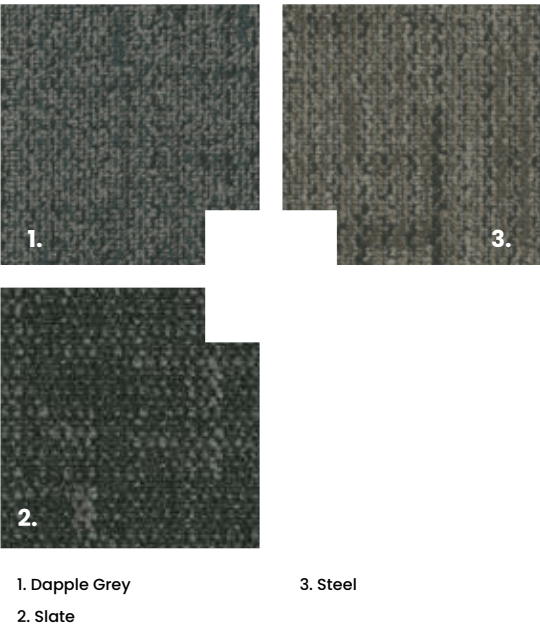

FREESTAHYL

15 OZ. PATTERNED SCROLL CARPET TILE



ZONES



INDOOR




Themes of contemporary art, Freestahyl translates the geometric patterns found in abstract murals of urban artistic expression into a free-form canvas for the floor. The modern-spirited conceptual motif scrolls across 24" x 24" tiles in 7 beautifully saturated neutral tones allowing design flexibility for a variety of creative and effortless installations.

SPECIFICATIONS


Construction	Patterned Scroll
Standard Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	8852 oz./y3 (328.24 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches	10.50 stitches/in (4.13 stitches/cm)
Total Thickness (nominal average)	0.217 inches
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Special Treatments	ProTex® Soil Release
Optional Backings	Nexus® Cushion
Standard Adhesive	Commercial on Premium Modular and LVT Adhesive

ENVIRONMENTAL SPECIFICATIONS & TESTS


SCAS / NSF 140	Gold Certified
Total Recycled Content	48.75%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450.0 flaming (ASTM E 662)
Static Test	Less than 3.0 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Light fastness	Yes

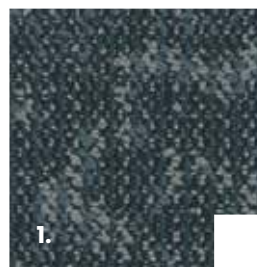


1.

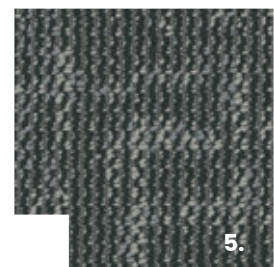


5.

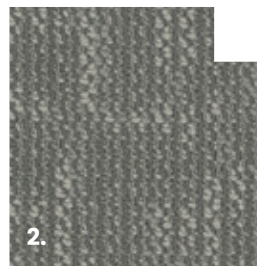


2.

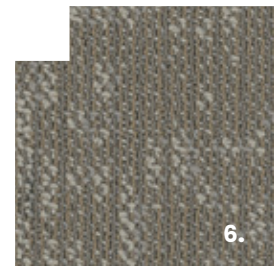


6.

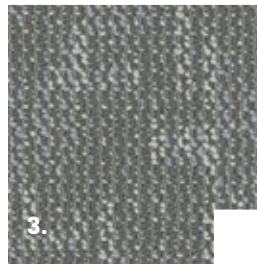

3.

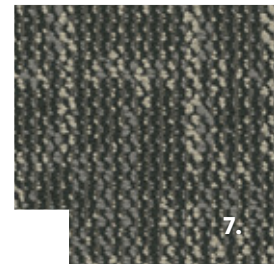

7.

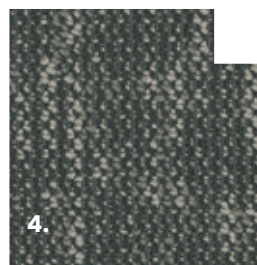

4.

- 1. Bice
- 2. Riverstone
- 3. Moleskin
- 4. Sloe

- 5. Blackstone
- 6. Adobe
- 7. Wren

NOORDIC

20 OZ. TEXTURED-LOOPCARPET TILE




Noordic carpet tiles are a low cost PET carpet product that doesn't sacrifice durability for price point. Available in several attractive color options, Noordic tiles come with added soil release treatment and are ADA compliant for accessible routes.

SPECIFICATIONS

Construction	Textured Loop
Standard Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	20 oz./sy (678 grams/m2)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Total Thickness (nominal average)	0.246 inches
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Special Treatments	ProTex® Soil Release
Optional Backings	Nexus® Cushion
Standard Adhesive	Commercial on Premium Modular & LVT Adhesive

ENVIRONMENTAL SPECIFICATIONS & TESTS

SCAS / NSF 140	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450.0 flaming (ASTM E 662)
Static Test	Less than 3.0 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Light fastness	Yes

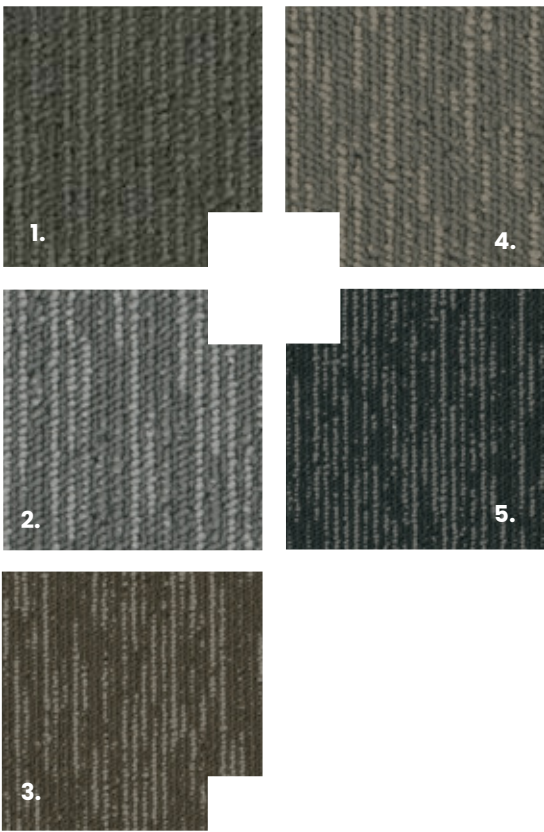

1. Nebulae
2. Comet
3. Stargaze
4. Constellation
5. North Star



ROVER

16 OZ. PATTERNED SCROLL CARPET TILE



ZONES



INDOOR



Rover Carpet Tiles, mimics the effect of shadows and light on linear design, resulting in an interplay of tone-on-tone lines that fade and meld into each other.


Five quick ship colorways with subtle neutrals and strategically placed stripes make for effortless and endlessly creative installations.

SPECIFICATIONS


Construction	Patterned Scroll
Standard Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	16 oz/sy (543 grams/m2)
Pile Density	9143 oz./y3 (339.03 kg/m3)
Pattern Repeat	N/A
Gauge 1/12	(4.72 rows/cm)
Stitches	10.20 stitches/in (4.02 stitches/cm)
Total Thickness (nominal average)	0.213 inches
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Special Treatments	ProTex® Soil Release
Optional Backings	Nexus® Cushion
Standard Adhesive	Commercial on Premium Modular and LVT Adhesive

ENVIRONMENTAL SPECIFICATIONS & TESTS

SCAS / NSF 140	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450.0 flaming (ASTM E 662)
Static Test	Less than 3.0 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Light fastness	Yes

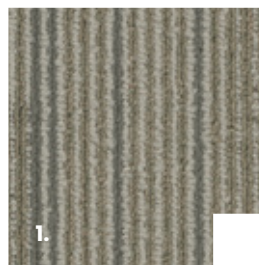


1.

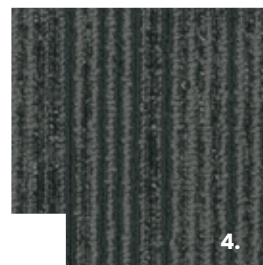

4.



2.

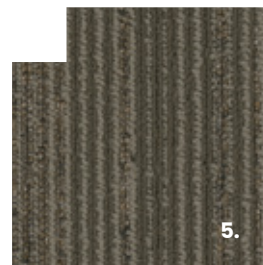

5.



3.

1. Solar Linen

2. Cosmic Blue

3. Interlapse Grey

4. Jet Lag

5. Standard Tan

Made for You Custom logo

*Bring your brand to life with
custom rugs & logo matting*

Your brand is unique; your flooring should be made to fit. van Gelder's industry-leading custom matting program makes showcasing your brand easier than ever. Whether it be a precision cut, hand-assembled inlaid logo mat or a printed mat to fit your budget, our team of dedicated experts can make it happen.

CUSTOM LOGO MATTING

10 BUSINESS DAYS ±2 DAYS | AVERAGE PRODUCTION TIME AFTER SIGNED ART PROOF

		Environment	Traffic Level	Custom Sizes	Recessed Application	Zone Application
Champion Super Nop \$\$\$	 	INDOOR OUTDOOR	High	Yes	Yes	1-2-3 ZONES
Needle punch Polypropylene Inlaid (Page 36, 37)						
Coco/Coir \$\$		INDOOR	Medium	Yes	Yes	2-3 ZONES
Coir (Coconut Fiber) Inlaid (Page 39)						
Fenway Nop \$\$	 	INDOOR OUTDOOR	Medium	Yes	Yes	1-2-3 ZONES
Needle punch Polypropylene Inlaid (Page 39)						
Windsor \$\$\$		INDOOR	Medium	Yes	No	2-3 ZONES
Nylon Inlaid (Page 39)						
Two-N-One \$\$\$	 	INDOOR OUTDOOR	High	Yes	Yes	1-2-3 ZONES
Hybrid Grid Mat Inlaid (Page 40)						



Note: Custom Lead-time based on designs.

(Mat edging profiles and more information can be viewed on page 89.)



EAGLE

44 OZ. BERBER INDOOR/OUTDOOR CARPET

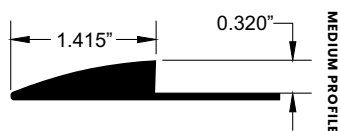



More Information on page 14.



FENWAY NOP

37 OZ. BERBER INDOOR/OUTDOOR CARPET

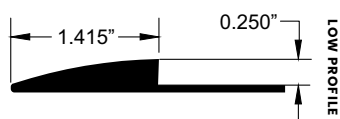


More Information on page 15.




WINDSOR

30 OZ. DESIGNER STRIAE INDOOR NYLON

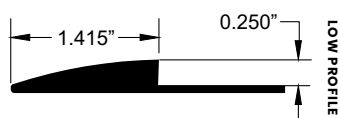

More Information on page 19.

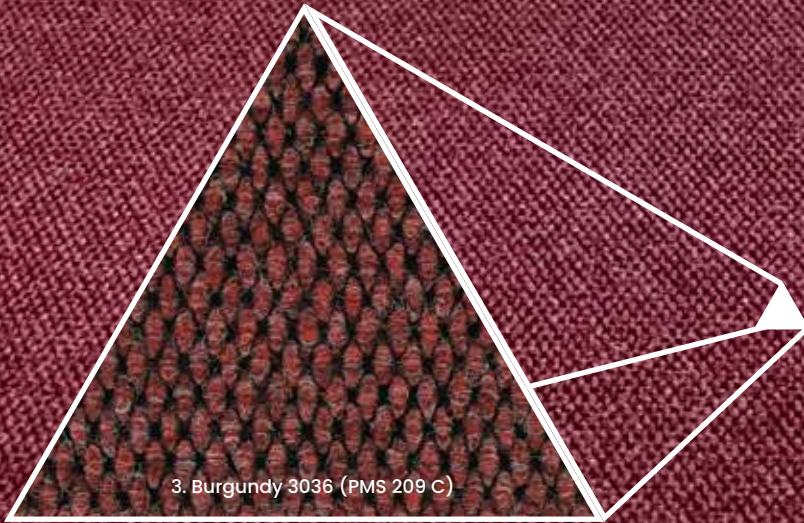

3. Burgundy 3036 (PMS 209 c)

Our most popular all-weather product has timeless style, incredible flexibility and unwavering performance put into a logo mat.

CHAMPION SUPER NOP

54 OZ. ALL-WEATHER BERBER MATTING



SPECIFICATIONS

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Hobnail (berber) Pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA® polypropylene
Backing:	Premium Composite Rubber
Pile Height (± 0.5mm):	0.25"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	54 oz./sy
Total Weight (± 7.5%):	78 oz./sy
Sheet/Roll Width (± 2%):	6'7" or 13'2"
AVG. Production (After signed art proof):	10 Working Days

STANDARD SIZES


18" x 24"	3' x 8'	4' x 10'	6' x 12'
2' x 3'	3' x 10'	4' x 12'	6' x 20'
3' x 4'	3' x 12'	6' x 6'	8' x 20'
3' x 5'	4' x 6'	6' x 8'	12' x 12'
3' x 6'	4' x 8'	6' x 10'	

CUSTOM SIZES

Widths Up to 13'2" without seams
Lengths Up to 100' Long

EDGING

Medium Profile (See page 89)
ADA compliant



- | | | | |
|-----------------------------------|--|-----------------------------------|--|
| 1. Bright Red 3014 (PMS 192 C) | 11. Sky Blue 5149 (PMS 291 C) | 21. Zinc 7006 (PMS 140 C) | 31. Gris/Charcoal 2098 (PMS Black 6 C) |
| 2. Solid Crimson 3031 (PMS 484 C) | 12. Royal Blue 5182 (PMS 285 C) | 22. Taupe 2345 (PMS 408 C) | 32. Teak 7185 (PMS 412 C) |
| 3. Burgundy 3036 (PMS 209 C) | 13. Turquoise 6096 (PMS 325 C) | 23. Autumn 2048 (PMS 404 C) | 33. Sterling 2344 (PMS 430 C) |
| 4. Garnet 3138 (PMS 7645 C) | 14. Verde Green 6043 (PMS 350 C) | 24. Hunter Green 6022 (PMS 342 C) | 34. Black Shadow 2343 (PMS Black 7 C) |
| 5. Pink 3091 (PMS 1905 C) | 15. Steel Blue 5157 (PMS 534 C) | 25. Loden 6081 (PMS Black 5 C) | 35. Solid Black 2000 (PMS Black) |
| 6. Cardinal Red 3353 (PMS 7623 C) | 16. Midnight Blue 5154 (PMS 7546 C) | 26. Sand 1064 (PMS 4665 C) | 36. White 1000 (PMS White) |
| 7. Orange 3018 (PMS 144 C) | 17. Prism 5155 (PMS 295 C) | 27. Coir/Natural 1099 (PMS 467 C) | 37. Carbon 9859 (PMS Cool Grey 11 C) |
| 8. Kelly Green 6042 (PMS 356 C) | 18. Azure 5181 (PMS 540 C) | 28. Rosewood 7178 (PMS 7589 C) | 38. Off White 1001 (PMS Warm Grey 1 C) |
| 9. Gold 1039 (PMS 7563 C) | 19. Purple 3090 (PANTONE™ Med. Purple) | 29. Chocolate 7097 (PMS 7596 C) | |
| 10. Yellow 1025 (PMS 121 C) | 20. Natural Beige 1153 (PMS 7530 C) | 30. Walnut 7068 (PMS 7519 C) | |

NOTE: PMS colors are subjective and listed for approximation only; they are not necessarily a match with actual product.

SYNTHETIC COCO

NON-WOVEN INDOOR/OUTDOOR
POLYPROPYLENE



The best of two worlds, Synthetic Coco offers the lush, natural look and feel of coconut coir fibers without compromise (or shedding).

SPECIFICATIONS

Manufacturing Process:	Non-woven
Surface Aspect:	Non-Directional Smooth/Velour
Fiber:	100% Solution-dyed UV stabilized polypropylene
Backing:	Non-Skid
Pile Height (± 0.5mm):	0.422"
Total Height (± 7.5%):	0.625"
Pile Weight (± 7.5%):	44 oz./sy
Total Weight (± 7.5%):	130 oz./sy
Sheet/Roll Width (± 2%):	6'7"
AVG. Production (After signed art proof):	10 Working Days

STANDARD SIZES



18" x 24"	3' x 8'	4' x 10'	6' x 12'
2' x 3'	3' x 10'	4' x 12'	6' x 20'
3' x 4'	3' x 12'	6' x 6'	8' x 20'
3' x 5'	4' x 6'	6' x 8'	12' x 12'
3' x 6'	4' x 8'	6' x 10'	

CUSTOM SIZES EDGING

Widths: Up to 12'
Lengths: Up to 40'

High Profile (See page 89)
ADA compliant

NOTE: *Custom Size Length and Width NO SEAMS

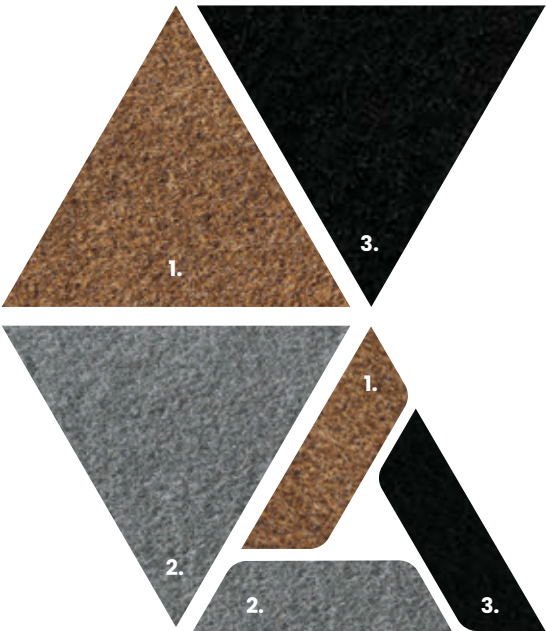

- 1. Natural SYN0111
 - 2. Grey SYN0311
 - 3. Black SYN0211
- Grey & Black color only available for Custom Logo Matting.

Custom "Logo" Matting | Synthetic Coco | Zones 1-2-3





NATURAL COCO/COIR

NATURAL FIBERS INDOOR MATTING



Unique as it is made from natural coconut fibers, our Coco/Coir matting is ideal for recessed wells and entryways.

SPECIFICATIONS

Manufacturing Process:	Fusion Bonded
Fiber:	Natural Coconut Fibers
Backing:	Natural Coconut Fibers (Coir)
Pile Height ($\pm 0.5\text{mm}$):	Vinyl
Total Height ($\pm 7.5\%$):	0.422"
Pile Weight ($\pm 7.5\%$):	0.625"
Total Weight ($\pm 7.5\%$):	44 oz./sy
Sheet/Roll Width ($\pm 2\%$):	120 oz./sy
AVG. Production (After signed art proof):	6'7"
	10 Working Days

STANDARD SIZES

18" x 24"	3' x 12'	4' x 10'	6' x 12'
2' x 3'	3' x 16'	4' x 12'	6' x 20'
3' x 4'	3' x 20'	4' x 16'	
3' x 5'	4' x 6'	4' x 20'	
3' x 10'	4' x 8'	6' x 8'	

CUSTOM SIZES

Widths: Up to 6'7" (Without seams)
Lengths: Up to 40'




EDGING

High Profile (See page 89)
ADA compliant



HIGH PROFILE
Brown, Black or None
(For recessed well applications)

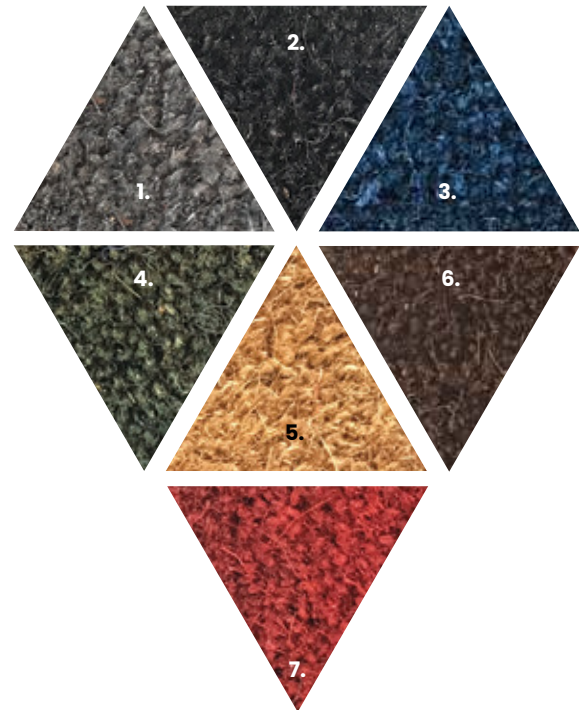

1. Grey NC01
2. Black NC02
3. Blue NC03
4. Green NC10

5. Natural NC04
6. Brown NC05
7. Red NC06

* All colors (except Natural 2013-03) are vegetable dyed.
Color transfer may occur if material gets wet.

TWO-N-ONE

HYBRID ENTRY MATTING



SPECIFICATIONS


Overall Thickness*:	0.5 in.
Grid Thickness*:	0.375 in.
Total Carpet Height*:	0.47 in
Carpet Pile Height*:	0.25 in.
Carpet Pile Weight*:	54 oz./sy
Total Carpet Weight*:	78 oz./sy
Carpet Backing*:	Premium Composite Rubber
Grid Backing:	Flexible PVC
Edging Material:	PVC
Roll Width:	3'3"
AVG. Production (After signed art proof):	10 Working Days


AVAILABLE CARPETS

* Champion Super Nop 54 oz. (These specs are listed above)
Fenway Nop 37 oz.
Windsor 30 oz


EDGING

Low Profile (See Page 89)
ADA compliant



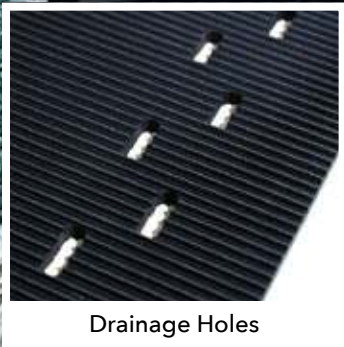

Drainage Holes

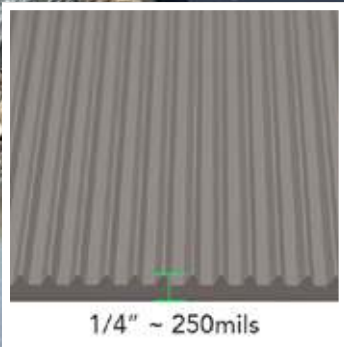

1/4" ~ 250mils



PINNACLE H.D.

PVC VINYL LOGO MATTING



SPECIFICATIONS

Construction:	Solid Polyvinyl Chloride matting
Primary Backing:	Vinyl Screen/mesh
Emboss Pattern:	V-Groove
Cut Tolerance:	1/4"
Thickness:	0.250" ± 0.025" (1/4", 250mils)
Tensile:	(ASTM D412) 400lb/in minimum
Elongation:	(ASTM D412) 125% minimum
Tear:	(ASTM D624) 65 lb/in minimum
Durometer:	(ASTM D2240): 80 ± 10, Shore A


TECHNICAL SPECIFICATIONS

Suggested Service Temperature:	-20 °F to +200 °F
--------------------------------	-------------------

AVAILABLE MAXIMUM DIMENSIONS

Horizontal Mat
4' x 12' | 48" x 144"

Vertical Mat
6' x 8' | 72" x 96"

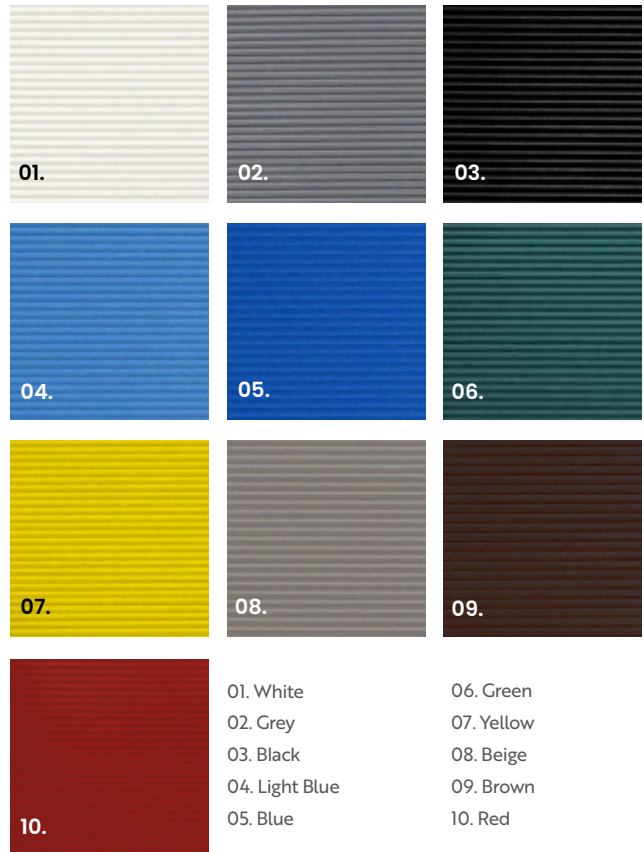

- 01. White
- 02. Grey
- 03. Black
- 04. Light Blue
- 05. Blue
- 06. Green
- 07. Yellow
- 08. Beige
- 09. Brown
- 10. Red

Commercial Matting

Whatever the Weather

Available in a multitude of sizes and styles, vG's high-performance on demand mats are as functional and flexible as they are attractive. Lightweight and easily removable, these commercial mats are easy to clean and place where needed.





CHANNEL RIB

INDOOR / OUTDOOR COMMERCIAL
MATTING



The classic ribbed commercial mat, vG's Channel Rib offers legendary quality with incredible value.

SPECIFICATIONS

Construction:	2 x 2 Ribbed Pattern
Fiber Content:	100% Solution Dyed Polypropylene
Backing:	Vinyl
Thickness:	5/16" (8mm)
Tufted Carpet Weight:	16 oz. per/sy
PVC Weight:	65 oz. per/sy
Total Weight (± 7.5%):	81 oz. per/sy
Wear Warranty:	1 Year on Flat Surfaces
Electrostatic Propensity:	Permanently Anti-Static

STANDARD SIZES

2' x 3'	3' x 6'	4' x 8'	6' x 60'
3' x 4'	3' x 10'	3' x 60'	
3' x 5'	4' x 6'	4' x 60'	

CUSTOM SIZES

Widths (Up to 6' without seams):	3' (36"), 4' (48"), 6' (72")
Lengths:	Up to 100' long



- 1. Dark Grey
- 2. Charcoal
- 3. Slate Blue
- 4. Evergreen
- 5. Brown
- 6. Red

TIDAL MAT / TIDAL DIAMOND

INDOOR / OUTDOOR MATTING



Tidal mat offers an on-demand solution for scraping dirt as well as keeping moisture and water below shoe level.

SPECIFICATIONS






Construction:	Waffle or Diamond Cleated Pattern
Fiber:	100% Solution-dyed polypropylene
Primary Backing:	Double Nitrile Rubber
Total Height:	3/8" (10mm)
Pile Weight:	24 oz/ sy
Total Weight:	104 oz/sy
Warranty:	2 Years on Flat Surfaces

STANDARD SIZES (ACTUAL MAY BE SMALLER)

2' x 3' (23" x 35")	3' x 14' (35" x 144")	4' x 12' (45" x 142")	6' x 10' (69" x 116")
3' x 4' (35" x 45")	3' x 20' (35" x 236")	4' x 14' (45" x 144")	6' x 12' (69" x 142")
3' x 5' (35" x 58")	4' x 4' (45" x 45")	4' x 16' (45" x 189")	6' x 14' (69" x 144")
3' x 8' (35" x 92")	4' x 6' (45" x 69")	4' x 20' (45" x 236")	6' x 16' (69" x 189")
3' x 10' (35" x 116")	4' x 8' (45" x 95")	6' x 5' (69" x 58")	6' x 18' (69" x 214")
3' x 12' (35" x 142")	4' x 10' (45" x 116")	6' x 8' (69" x 95")	6' x 20' (69" x 236")

*CUSTOM SIZES

Widths (Actual):	3' (35"), 4' (45"), 6' (70")
Lengths:	Up to 20' long



- | | |
|--------------|-------------|
| 1. Grey* | 5. Brown* |
| 2. Charcoal* | 6. Red |
| 3. Navy* | 7. Burgundy |
| 4. Evergreen | |

Note: * Available in Tidal Diamond

Luxury Vinyl Planks & Tiles

Industry-leading beauty and performance.

Robust, easy to maintain and naturally beautiful, vG's line of Luxury Vinyl offers industry-leading quality and longevity. From the classic 20MIL Oak Collection of wood look planks, to the jaw-dropping realism and performance of our 40MIL Style Rustique line, Natures View is the luxury vinyl you need.

NATURES VIEW STYLE RUSTIQUE

40MIL LUXURY VINYL PLANK • 7" X 48"



SPECIFICATIONS

Manufacturing Standard:	Class III Printed Film Vinyl Plank; 1x Coated Registered Embossed Surface*
Overall Thickness:	3.175mm 0.125"
Wear Layer Thickness:	1.0mm 40mil
Plank Size:	7" x 48"
Weight per Plank:	2.32 lbs
Packaging:	15 planks/carton (35 sq. ft; 34.81 lbs)
Static Load (ASTM F970 - Modified)	2000psi
Slip Resistance (ASTM D 2047)	Pass: 0.61 (Exceeds ADA Standards)

Manufacturing Standard:	Class III Printed Film Vinyl Plank; 1x-Coated Type B Embossed Surface
Overall Thickness:	3.175mm 0.125"
Wear Layer Thickness:	1.0mm 40mil
Plank Size:	6" x 36"
Weight per Plank:	1.49 lbs
Packaging:	26 planks/carton (39 sq. ft; 38.82 lbs)
Static Load (ASTM F970 - Modified)	2000psi
Slip Resistance (ASTM D 2047)	Pass: 0.61 (Exceeds ADA Standards)

FLAMMABILITY RATING

Radiant Panel Test (ASTM E648):	Class I
Smoke Density (ASTM E662):	Pass (<450 sdi)
Heat Stability (ASTM I514):	Pass
HUD/FHA Requirements:	Exceeds



01. Weathered Barn NVR2166 | LVP 6" x 36" 40mil ONLY.



- 1. Antique Brown NVR9415*
- 2. Dove NVR7283
- 3. Cape Cod Grey NVR7285
- 4. Silver Sand NVR6841

- 5. Anchor Grey NVR6846
- 6. Wheatfields NVR9825
- 7. Canyon Dust Cross-Cut NVR5476*
- 8. Honduran Rosewood NVR9822

- 9. African Blackwood NVR9848
- 10. Sundried Teak NVR7305
- 11. Windswept Beige NVR9844

- 12. Oak Barrel NVR9675
- 13. Whiskey Cross-Cut NVR5478*

*Note: Antique Brown NVR9415, Canyon Dust Cross-Cut NVR5476 and Whiskey Cross-Cut NVR5478 are not registered embossed.



The NV Style Rustique Collection is the industry leader in scratch resistance. Designed with a registered embossed layer to look and feel like authentic hardwood, mixed with a 40MIL wear layer, you won't have to worry about all of the typical maintenance concerns you get with typical hardwood floors.

NATURES VIEW STYLE RUSTIQUE

40MIL LUXURY VINYL TILE • 18" X 18"

& TWO COLORS IN 18" X 36"



Featuring a selection of our best-selling designs, the form and function of luxury vinyl is combined with the look and texture of natural stone and stained concrete. This resilient 40MIL wear layer and annealed construction protect your investment with superior performance even in high-traffic areas.

SPECIFICATIONS

Manufacturing Standard:	Class III Printed Film Vinyl tiles; 1x Coated Type B Embossed Surface
Overall Thickness:	3.175mm 0.125"
Wear Layer Thickness:	1.0mm 40MIL
Plank Size:	18" x 18" 18" x 36"
Weight per Tile:	2.08 lbs (18" x 18") 4.365 lbs (18" x 36")
Packaging:	18" x 18": 16 tiles/carton (36 sq. ft; 36 lbs) 18" x 36": 8 tiles/carton (36 sq. ft; 37 lbs)
Static Load (ASTM F970 - Modified)	2000psi
Slip Resistance (ASTM D 2047)	Pass 0.61 (Exceeds ADA Standards)

FLAMMABILITY RATING

Radiant Panel Test (ASTM E648)	Class 1
Smoke Density (ASTM E662)	Pass (<450 sdi)
Heat Stability (ASTM 1514)	Pass
HUD/FHA Requirements	Exceeds



- | | | |
|----------------------------|-----------------------------|-------------------------|
| 1. Urban Grey NVC3342 | 2. Mink Slate VNHT403 | 3. Ostrich Grey NVC3879 |
| 4. Toasted Almond NVC1739 | 5. Oxidized Pewter NVC1737 | 6. Oyster NVC1738 |
| 7. Limestone NVC3061 | 8. Metallic Delight NVC2893 | 9. River Rock NVC2891 |
| 10. Silver Knight NVC3744• | 11. Titanium NVC3724• | |

*Colors marked with • also available as 18" x 36" tiles.

53

Luxury Vinyl Tiles | 18" x 18" & 18" x 36" • 40MIL | Zone 3



Grid Entry

*Taking occupant safety & indoor
air quality to the next level*

Part of a comprehensive entrance defense system, van Gelder's
grid matting solutions offer world-class performance.

FRONTRUNNER

REGULAR & LP | QUIET VINYL GRID ENTRY



Quiet, easy to work with and incredibly effective, vG's Frontrunner line has redefined grid entry.

SPECIFICATIONS


Composition:	Flexible PVC
Overall Thickness:	Regular: 0.563" (14mm) LP: 0.375" (10.5mm)
Roll Widths:	4' only
Roll Lengths:	33' (Standard)
LEED-NC	MR Credit 4 IEQ Credit 5

TECHNICAL SPECIFICATIONS


Friction (ASTM C1028):	(Wet) 0.54. (Dry) 0.66
DIN 51130:	R11, VI0
Fire Resistance (ASTM E648)	Class 1
Abrasion (ASTM D3884):	0.4%/ 1,000 cycles
UV Resistance (BS EN 607):	Δ E 1.02 (Uncolored Material)

FLAMMABILITY RATING

Thermal Ratings:	≥-23°C, ≤+60°C
Flame Retardant Grade (EN ISO 13501-1:2007-CFL)	S1

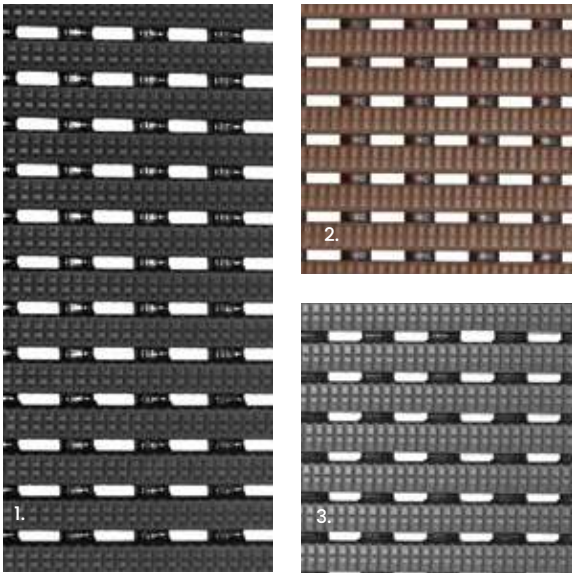

1. Black
2. Brown
3. Grey

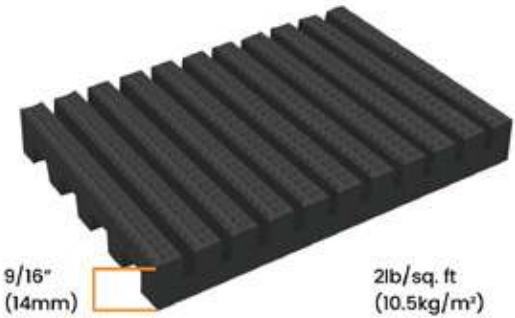

FRONTRUNNER PLUS

CARPETED REGULAR & LP | QUIET VINYL GRID ENTRY



For added cleaning power, we've combined the heel and wheeled traffic-friendly Frontrunner grid with scraping carpet to prevent excess grime and moisture from entering your space.

SPECIFICATIONS


Grid Composition:	Flexible PVC
Overall Thicknesses:	Regular: 0.625" (16mm) LP: 0.50" (12mm)
Grid Thicknesses:	Regular: 0.563" (14mm) LP: 0.375" (10.5mm)
Carpet Pile Height:	0.27" 7mm
Carpet Pile Weight:	24.2 oz/sy
Total Carpet Weight:	126 oz/sy
Roll Widths:	4' only
Roll Lengths:	33' (standard)
Thermal Ratings:	≥ -23°C, ≤ +60°C
LEED-NC	MR Credit 4 IEQ Credit 5

TECHNICAL SPECIFICATIONS (GRID)

Friction (ASTM C1028):	Wet .54 Dry .66 DIN 51130: R11, V10
Fire Resistance (ASTM E648):	Class I
Abrasion (ASTM D3884):	0.4% / 1,000 cycles
UV Resistance:	Δ E 1.02 (Uncolored Material)

TECHNICAL SPECIFICATIONS (CARPET)

Fiber:	100% BCF Nylon (Tufted)
Backing:	Colback non-woven polyester (Primary) Comfort vinyl (Secondary)
Carpet Attachment Method:	Ultrasonic Welded
Electrostatic Propensity (DIN EN 1815):	> 2kV
Smoke Density (ASTM E662-13):	Pass
Surface Flammability (FF 1-70/ASTM D2859):	Pass

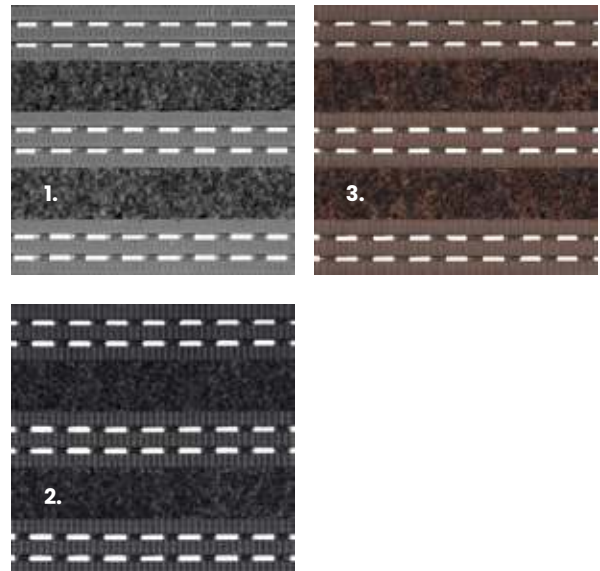

1. Grey LP vinyl with Steel Grey 606 carpet
2. Black vinyl with Smoke 608 carpet
3. Brown LP vinyl with Coffee Bean 605 carpet




5/8"
(16mm)

2lb/sq. ft
(10.5kg/m²)

FRONTRUNNER SB

SOLID-BACKED | QUIET VINYL GRID ENTRY




All the functionality of Frontrunner without the need for a mat well.

SPECIFICATIONS


Composition:	Flexible PVC
Overall Thickness:	0.25" (6.5mm)
Friction ASTM C1028:	0.54 (Wet), 0.66 (Dry)
DIN 51130:	RII, V10
UV Resistance (BS EN 607):	Δ E 1.02 (Uncolored Material)
Thermal Ratings:	≥ -23°C, ≤ +60°C
Roll Width:	3'3"
Roll Lengths:	33' (Standard)

FLAMMABILITY RATING



Fire Resistance (ASTM E648)	Class I
Flame Retardant Grade (EN ISO 13501-1:2007-CFL)	S1
LEED-NC	MR Credit 4 IEQ Credit 5

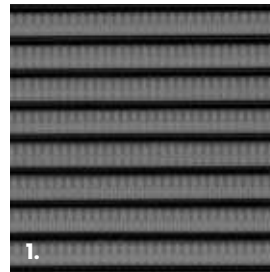

1. Grey

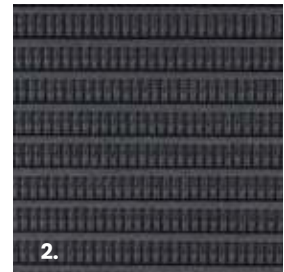

2. Black

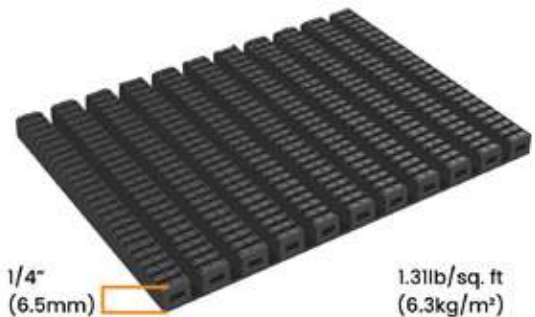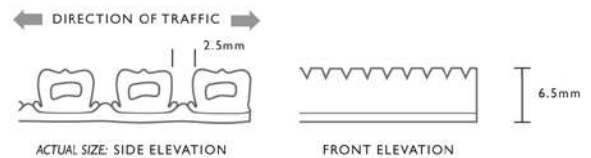

1/4"
(6.5mm)

1.31lb/sq. ft
(6.3kg/m²)

FRONTRUNNER PLUS SB

GRID MATTING SYSTEMS



Frontrunner Plus SB is a well proven first barrier to prevent dirt from entering buildings.

SPECIFICATIONS

Grid Composition:	Flexible PVC
Overall Thickness:	0.315" (8mm)
Grid Thickness:	0.25" (6.5mm)
Total Carpet Thickness:	0.35" (9mm)
Carpet Pile Height:	0.27" 7mm
Carpet Pile Weight:	24.2 oz/sy
Total Carpet Weight:	126 oz/sy
Roll Widths:	3'3" available
Roll Lengths:	33' (standard)

LEED-NC

MR Credit 4 | IEQ Credit 5

TECHNICAL SPECIFICATIONS (GRID)

Friction ASTM C1028:	0.54 (Wet), 0.66 (Dry) DIN 51130: R11, V10
Fire Resistance (ASTM E648):	Class 1
Flame Retardant Grade (EN ISO 13501-1:2007-CFL):	S1
Abrasion (ASTM D3884):	0.4%/ 1,000 cycles
UV Resistance (BS EN 607):	Δ E 1.02 (Uncolored Material)
PVC material:	BS EN 607 = Delta E 1.02

TECHNICAL SPECIFICATIONS (CARPET)

Fiber:	100% BCF Nylon (Tufted)
Backing:	Colback non-woven polyester (Primary) Comfort vinyl (Secondary)
Carpet Attachment Method:	Ultrasonic Welded
Electrostatic Propensity (DIN EN 1815):	> 2kV
Smoke Density (ASTM E662-13):	Passes
Surface Flammability (FF 1-70/ASTM D2859):	Passes




1. Black vinyl with Smoke 608 carpet



HERON TILE

INTERLOCKING SAFETY GRID TILE




Indoor areas around swimming pools, saunas, jacuzzi, shower areas in locker rooms or other wet areas where barefoot traffic is extensive.

SPECIFICATIONS

Overall Height:	5/8 in. 15mm
Tile Size:	13" x 13" 33 x 33cm
Weight:	0.82 lbs/sq. ft
Limited Warranty:	3 years
Ask for warranty sheet for details	

TECHNICAL SPECIFICATIONS (GRID)


Acoustic:	Excellent sound absorption properties
Chemical:	Ask for specific resistances
Composition:	Molded Ethylene Vinyl Acetate (EVA)
Slip Resistance - DIN 51097:	Classification C
UV Light:	Resistant to PVC degradation

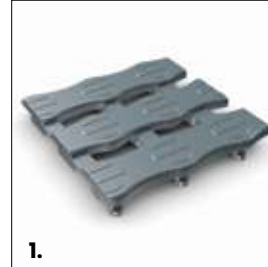

1.



4.

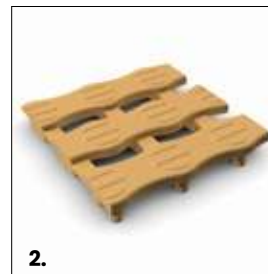

2.



5.

1. Light Grey
2. Beige

3. Light Blue
4. Ocean Blue





HERON RIB

NON-POROUS PVC WITH CHanneled
UNDER BARS






SPECIFICATIONS

Composition:	Flexible Polyvinyl Chloride (PVC)
Overall Thickness:	13/32 in. 10.5mm.
Roll Options:	2', 3' or 4' widths 33' Length
Weight:	1.10 lbs/sq. ft
Surface Aspect:	Two layer construction and channeled under bars
Gauge (± 10%):	13/32" (10.5mm)
Available Sizes:	2' x 33' 3' x 33' 4' x 33'
(PVC) Certified Slip Resistance:	ASTM F 1677: Dry: 0.9 Wet: 0.7
DIN 51097:	Classification C
UV Light:	Resistant to PVC degradation

FLAMMABILITY RATING

Certified EN 13501:	CFL-SI
LEED-NC	MR Credit 4 IEQ Credit 5

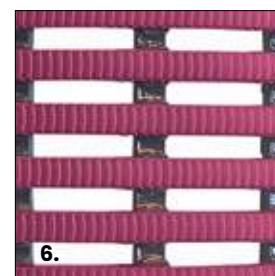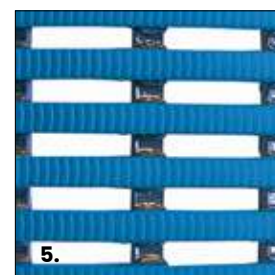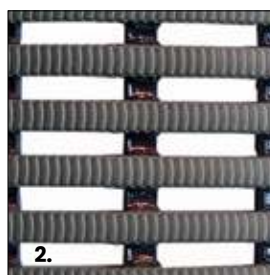

1. White
2. Charcoal Grey
3. Oxford Blue

4. Forest Green
5. Ocean Blue
6. Mulberry Red

TWO-N-ONE

HYBRID GRID ENTRY MAT



A van Gelder original, this hybrid matting offers the performance of a full entry system in a portable mat form.

SPECIFICATIONS

Overall Thickness:	0.5"
Grid Thickness:	0.375"
Total Carpet Thickness:	0.47"
Carpet Pile Height:	0.25"
Carpet Pile Weight:	54 oz/sy
Total Carpet Weight:	78 oz/sy
Backing (Grid):	Flexible PVC
Backing (Champion Super Nop*):	Premium Composite Rubber
Edging Material:	PVC

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass
LEED-NC :	MR Credit 4 IEQ Credits 4.1, 4.3, 5



TECHNICAL SPECIFICATIONS


Grid Composition & Dimensions:	
Grid Material:	PVC (Ribbed Grid)
Carpet Fiber:	100% Solution-dyed UV stabilized ASOTA* polypropylene (Non-woven hobnail (berber) pattern)
Dimensional Stability (ASTM D7570-09):	Pass
Electrostatic Propensity (EN 1815):	>2kV
Electrical Resistivity (IBM / ICL):	Pass, for R.H. ≥ 40%
Sound Insulation (ISO 10140-1:2010):	≥ 21dB
Thermal Retention (ISO 11092):	0.15 m K/W Pass

**Specifications assume Champion Super Nop (Pg. 10-11) As selected walk off carpeting. Actual specifications may vary depending on selected walk off carpet. Consult your representative or call 1+ 706-602-4186 for further information.*



SNAP TRAX TILE

INTERLOCKING TILE GRID ENTRY WITHOUT CARPET



Made from recyclable UV-resistant TPE compound, Snap Trax has an enhanced drying & scraping system that can be added into a larger Snap Trax system.

SPECIFICATIONS


Construction:	100% TPE
Total Height:	0.47"
Total Weight:	2.5lbs.
Tile Size:	19.69" x 19.69"
Tiles (19.69" x 19.69" ea.):	10 tiles per box (27.1 sq. ft.)
Standard Rolling Load:	1,000 lbs.

SNAP TRAX CLIPS

Clip Material:	304 Stainless Steel
Clip Color:	Black (Electro Coating)
Clip Size:	5.7" x 0.55"
Clip Thickness:	2mm
Clip Weight:	0.4kg

FLAMMABILITY RATING

Friction (ASTM D-2047-96)	Wet .60
Standard Rolling Load	1,000lbs
Fire Resistance (ASTM E648)	Class I
UV Resistance	Utilizes recyclable, UV resistant PVC/TPE
LEED-NC	Version 3 Credit 5, 4.3 MR Credit 4, 6

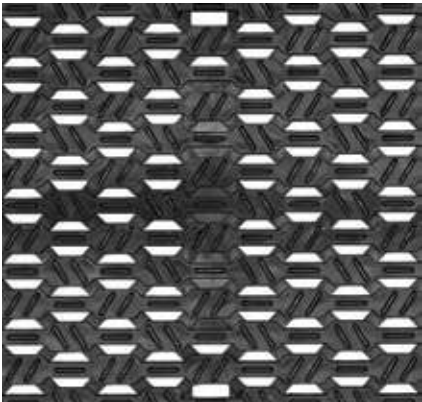

1. Black Vinyl
2. Tile Edges



- Patent pending locking Clip

Features & Benefits


- Patent pending locking clip to keep grids in place in high shear locations
- Interlocking 50cm x 50cm tiles allow versatility and customization for virtually any vestibule.
- Ability to link both carpeted and non-carpet versions in the same grid to offer better wiping/scraping in one system.

Features & Benefits

- Interlocking 50cm x 50cm tiles allow versatility and customization for virtually any vestibule.
- Ability to link both carpeted and non-carpet versions in the same grid to offer better wiping/ scraping in one system.

SNAP TRAX PLUS TILE

INTERLOCKING TILE GRID ENTRY WITH CARPET



With an enhanced drying and scraping system, Snap Trax will keep your entryways free of all dirt and debris.

SPECIFICATIONS


Construction:	TPE/PVC with Nylon Carpet
Total Height:	0.47"
Total Weight:	3.0 lbs.
Insert Carpet:	18.70" x 1.38"
Tile Size:	19.69" x 19.69"
Tiles (19.69" x 19.69" ea.):	12 tiles per box (32.5 sq. ft.)

SNAP TRAX CLIPS

Clip Material:	304 Stainless Steel
Clip Color:	Black (Electro Coating)
Clip Size:	5.7" x 0.55"
Clip Thickness:	2mm
Clip Weight:	0.4kg

FLAMMABILITY RATING

Friction (ASTM D-2047-96)	Wet .60
Standard Rolling Load	1,000lbs
Fire Resistance (ASTM E648)	Class 1
UV Resistance	Utilizes recyclable, UV resistant PVC/TPE
LEED-NC	Version 3 IEQ Credit 5, 4.3 MR Credit 4, 6

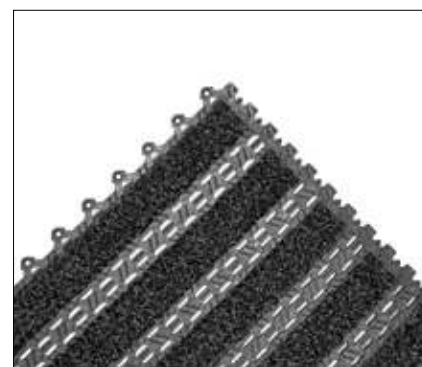

1. Dark Grey (Stocked)


Note: More colors available for Custom Orders, ask your rep today.



- Patent pending locking clip to keep grids in place in high shear locations.

S-TRAX PLUS

INTERLOCKING CARPETED GRID TILE MATTING




Provides a beautiful, linear finished appearance and is functionally unsurpassed.

SPECIFICATIONS

Carpet/Grid Composition:	Tufted Carpet/Ribbed vinyl
Overall Thickness:	9/16" (15mm)
Grid Thickness:	7/16" (11mm)
Pile Weight:	23.65 oz/sy
Total Product Weight:	5.22 lbs. per tile
Tile Size:	19.69" x 19.69"
Carpet Strip Width:	2" wide
Packaging:	12 tiles (32.5 sq. ft.; 62 lbs.)/Carton
LEED-NC	Version 3 IEQ Credit 5, 4.3 MR Credit 4, 6

CARPET PROPERTIES

Manufacturing Process:	Tufted
Surface Aspect:	Cut Pile
Fiber:	PA6 Nylon
Backing:	PVC
Pile Height (± 0.5mm)	0.20"
Total Height (± 7.5%):	0.301"
Pile Weight (± 75%):	23.65 oz/sy
Total Weight (± 75%):	101.79 oz/sy

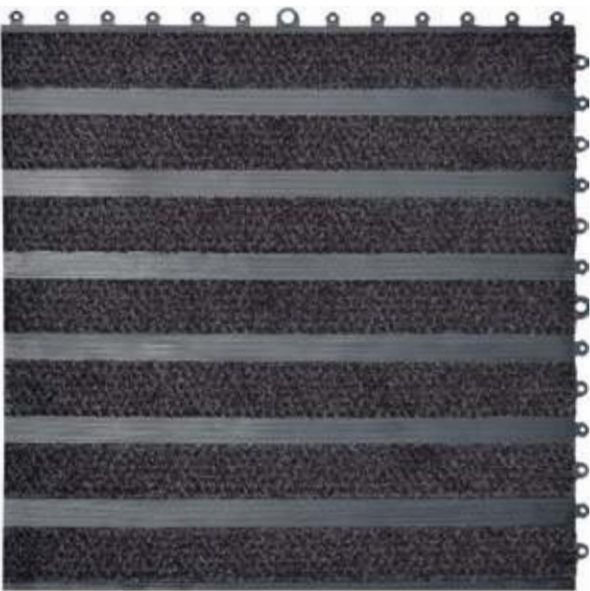

1. Dark Grey



RECESSED OR SURFACE MOUNTED ANCILLARIES

ENTRANCE MATTING RECESS OR SURFACE MOUNTED ANCILLARY FLOORING OPTIONS



*Frames also available in a Matte Black Finish.



'H' SECTION

Aluminum with matching PVC insert
0.5"W x 9' 10"L x 0.4375"H

Used as "an invisible divider" For front to back installations of 14mm/10.5mm matting.



'TLP' SECTION

Mill-Finished Pre-Drilled Aluminum Frame
1.3125"W x 8'L x 0.5"H

Used as divider for large left to right installations of 10.5mm matting.



'U' SECTION

Mill-Finished Pre-Drilled Aluminum Frame
0.75" W x 9' 10" L x 0.5625" H

Used as a front to back frame or divider used with 14mm matting.



LOW PROFILE 'ULP' SECTION

Mill-Finished Pre-Drilled Aluminum Frame*
0.75"W x 8'L x 0.4375"H

Used as a front to back frame or divider used with 10.5mm matting.



'T' SECTION

Mill-Finished Pre-Drilled Aluminum Frame
1.0625" W x 9' 10" L x 0.625" H

Used as divider for large left to right installations of 14mm matting.



EDGE 'RLPX'

Mill-Finished Pre-Drilled Aluminum Frame
1.56"W x 12'L x 0.5"H

Used to transition from 10.5mm matting to carpet tiles.



EDGE 'R'

Mill-Finished Pre-Drilled Aluminum Frame
0.75" W x 9' 10" L x 0.5625" H

Used for left and right extremities of well to cap and secure ends of 14mm matting.



LOW PROFILE EDGE 'RLP'

Mill-Finished Pre-Drilled Aluminum Frame*
1"W x 8'L x 0.50"H

Used for left and right extremities of well to cap and secure ends of 14mm matting.



EDGE 'Z'

Mill-Finished Pre-Drilled Aluminum Frame
1.3125"W x 12'L x 0.5"H

Used for left and right extremities of 10.5mm matting in conjunction with ceramic tiles.




EDGE 'J'

Mill-Finished Pre-Drilled Aluminum Frame
1.5"W x 10'L x 0.625"H



Used for left and right extremities of well to cap and secure ends of 14mm matting when against a wall.

RECESSED ANCILLARIES


For recessed applications, a full range of frames and dividers are purposely designed to provide level and smooth transitions, and simple installations during actual entrance fit out.




For left and right extremities of well to cap and secure ends of 14mm/10.5mm matting.





Used for left and right extremities of 10.5mm matting in conjunction with ceramic tiles.




Used as "an invisible divider" for front to back installations of 14mm/10.5mm matting.





For circular door and non-rectangular installations of 14mm matting.

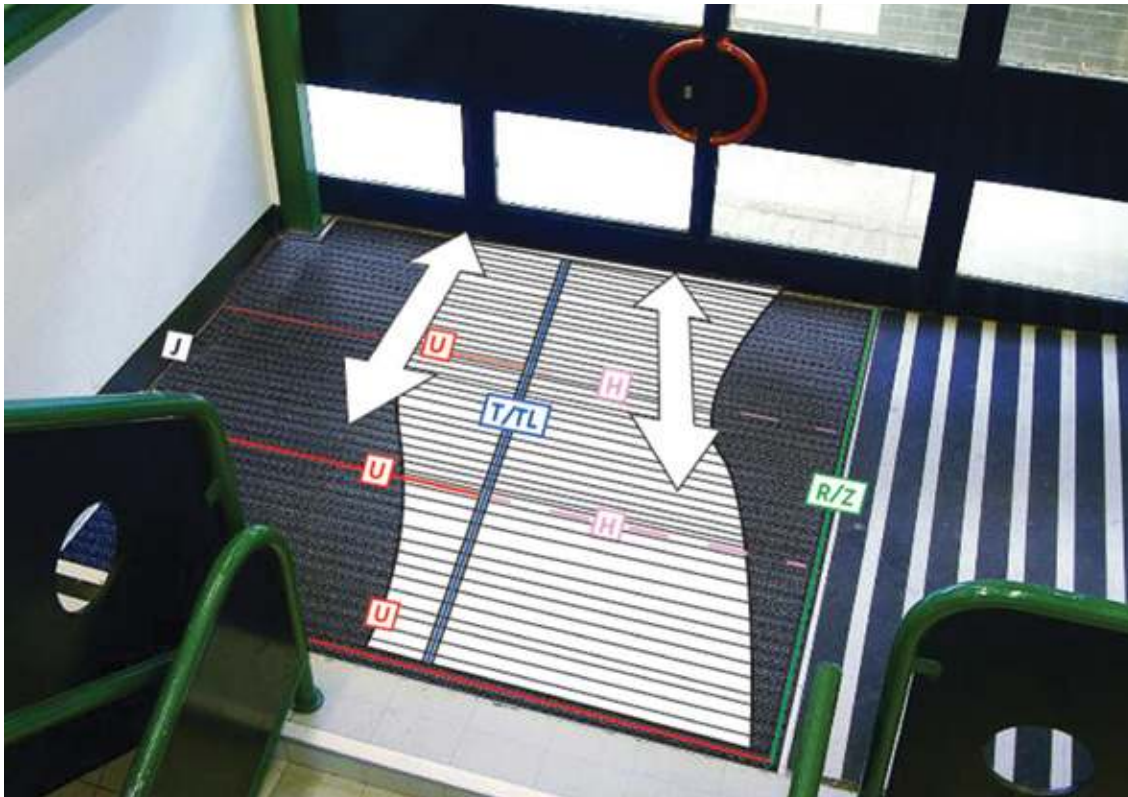

A front to back frame or divider used with 14mm/10.5mm matting.



Frames of different widths used as dividers for large left to right installations of 14mm matting.



For left and right extremities of well to cap and secure ends of 14mm matting when against a wall.



Aluminum frames are available in natural anodized finish. For design elegance and color continuity, the U, R and T frames are also available in Dark Grey and Black. Edge J, in rigid PVC, is available in Dark Grey or Black.

Industrial & Anti-Fatigue

Designed to maximize safety and productivity.

Carefully designed solutions that keep workers safe and comfortable for prolonged periods of time, these mats help increase productivity while reducing the risk of on-the-job injuries.

LUXURY STEP

1/2" SMOOTH TOP ANTI-FATIGUE MATTING



SPECIFICATIONS

Manufacturing Process:	Solid vinyl wear layer polymerically bound to soft, Moisture-Resistant closed-cell vinyl sponge
Surface Aspect:	Smooth, non-embossed matte finish
Overall Gauge ($\pm 0.050"$)	$\sim 1/2"$ (470mil)
Wear Layer Gauge ($\pm 0.10"$)	$\sim 5/64"$ (80mil)
Foam Cushion Gauge ($\pm 0.040"$)	$\sim 25/64"$ (390mil)
Foam Cushion Density:	12 lbs/ft ³

TECHNICAL SPECIFICATIONS

Tensile Strength (ASTM D412, Die C):	200 lbs/sq. in.
Elongation (ASTM D412, Die C):	80% minimum
Tear Strength (ASTM D624, Die C):	40 lbs/sq. in.
Durometer (ASTM D2240):	65 ± 5 (Shore 'OO')

FLAMMABILITY RATING

Horizontal Burn Test (DOT FMVSS 302):	Pass
Methenamine Tablet Test (CPSC FF 1-70):	Pass ($< 1" \varnothing$)

AVAILABLE SIZES

2' x 3'	3' x 5'	3' x 10'	3' x 12'	3' x 60'
---------	---------	----------	----------	----------

(Custom Sizes at a Premium)



1. Solid Black

2. Grey

Grid Entry | Surface Recessed Ancillaries



70

ELITE STEP

1/2" LEATHERED-GRAINED ANTI-FATIGUE MAT



SPECIFICATIONS

Manufacturing Process:	Solid vinyl wear layer
	Polymerically bound to soft,
	Moisture-Resistant closed-cell sponge
Surface Aspect:	Matte leather-patterned emboss
Overall Gauge ($\pm 0.050"$)	$\sim 1/2"$ (470mil)
Wear Layer Gauge ($\pm 0.10"$)	$\sim 5/64"$ (80mil)
Foam Cushion Gauge ($\pm 0.040"$)	$\sim 25/64"$ (390mil)
Foam Cushion Density:	12 lbs/ft ³

FLAMMABILITY RATING

Horizontal Burn Test (DOT FMVSS 302):	Pass
Methenamine Tablet Test (CPSC FF I-70):	Pass ($<1"$ Ø)

AVAILABLE SIZES

2' x 3'	3' x 5'	3' x 10'	3' x 12'	3' x 60'
---------	---------	----------	----------	----------

(Custom Sizes at a Premium)



1. Solid Black

2. Tan

COMFORT STEP 42

3/8" THICK ANTI-FATIGUE MATTING



SPECIFICATIONS

Manufacturing Process:	Closed-cell Expanded PVC Sponge
Surface Aspect:	Rib Emboss (Standard) or Pebble Emboss
Gauge ($\pm 10\%$):	3/8" (375mil)

FLAMMABILITY RATING

Horizontal Burn Test (DOT FMVSS 302):	Pass
Methenamine Tablet Test (CPSC FF I-70):	Pass* $<1"$ diameter

**Note: Product failed to burn long enough to reach the required 1.5" length to start test.*

AVAILABLE SIZES

2' x 3'	3' x 5'	3' x 60'	6' x 60'
2' x 60'	3' x 12'	4' x 60'	

(Plus Custom Sizes at a Premium)



Pebbled Texture:
1. Black with Yellow Border
2. Grey
3. Solid Black

Ribbed Texture:
4. Black with Yellow Border
5. Grey
6. Solid Black

COMFORT STEP ESD

3/8" INDUSTRIAL ANTI-STATIC ANTI-FATIGUE MATTING



SPECIFICATIONS

Manufacturing Process: Closed-cell expanded PVC Sponge
 Surface Aspect: Pebble Emboss
 Gauge ($\pm 10\%$): 3/8" (375 mils)

FLAMMABILITY RATING


Horizontal Burn Test (DOT FMVSS 302): Pass
 Methenamine Tablet Test (CPSC FF I-70): Pass* <1" diameter

ELECTROSTATIC PROPERTIES

Static Dissipative Properties: R_{1T} and R_{10} to be low-to-mid $10^8 \Omega$

AVAILABLE SIZES

2' x 3' 2' x 60' 3' x 5' 3' x 60' 4' x 60'

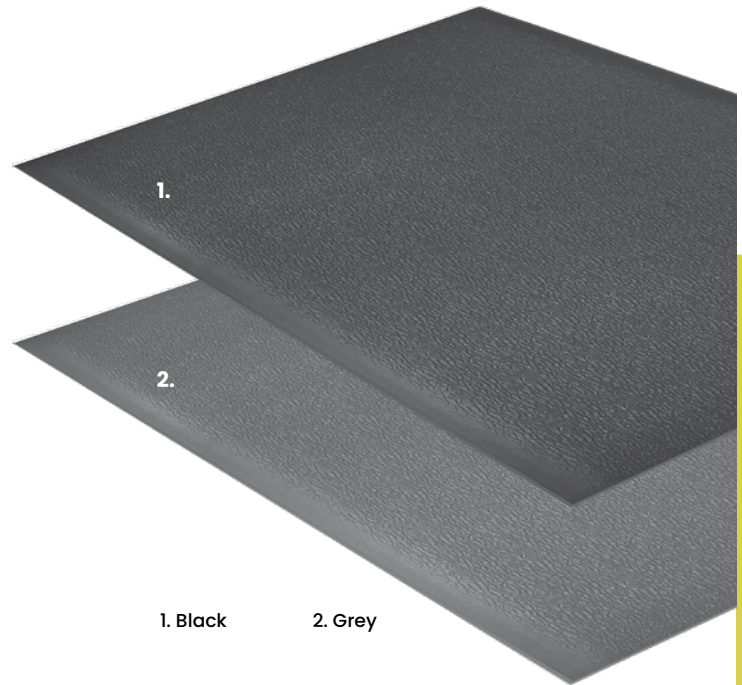

1. Black

2. Grey

COMFORT STEP DIAMOND

1/2" DUAL DENSITY ANTI-FATIGUE MATTING



SPECIFICATIONS

Manufacturing Process: High density vinyl foam
 polymerically bound to a moisture resistant
 a closed-cell vinyl sponge
 Surface Aspect: Diamond Pebble
 Overall Gauge ($\pm 10\%$): 0.500" $\pm$ 0.050" (1/2", 500mils)

FLAMMABILITY RATING


Horizontal Burn Test (DOT FMVSS 302): Pass
 Methenamine Tablet Test (CPSC FF I-70): Pass* <1" diameter

**Note: Product failed to burn long enough to reach the required 1.5" length to start test.*

AVAILABLE SIZES

2' x 3' 3' x 5' 3' x 12' 3' x 60' 4' x 60'

(Plus Custom Sizes at a Premium)

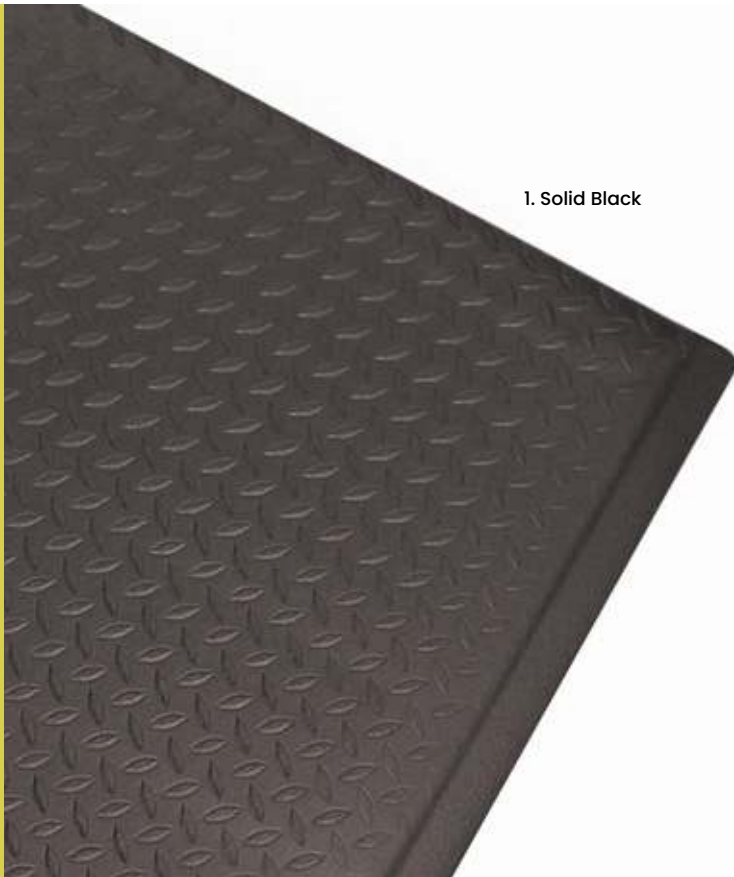

1. Solid Black

KITCHEN MAT

1/2" ANTI-FATIGUE MATTING WITH
DRAINAGE HOLES



Keeping traction and comfort in wet or dry working conditions is essential to a safe and productive work area. A staple in any commercial kitchen or behind bar areas, our Kitchen Mats provide solutions for both wet and food - service areas.

SPECIFICATIONS

Compound:	50% Nitrile Rubber
Surface Aspect:	Rectangular walls with drainage holes
Nominal Thickness:	0.50" (12.7mm)
Weight:	~21 lbs
Water-Resistant:	Yes (Black Only)
Greaseproof:	Yes (Red Only)




AVAILABLE SIZES

1/2" Red (Greaseproof) & 1/2" Black (Water-resistant)

3' x 5' 3' x 10'


GRITTTUFF™ BLACK ONLY IN:

3' x 5' 3' x 10' 3' x 15' 3' x 20'

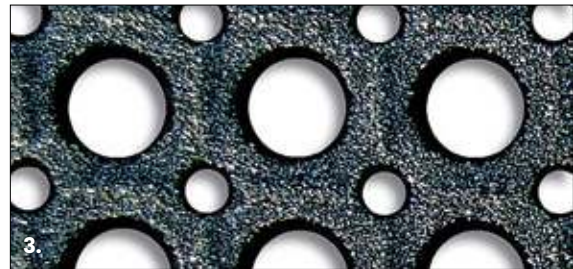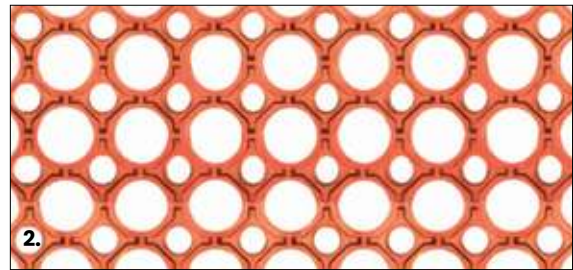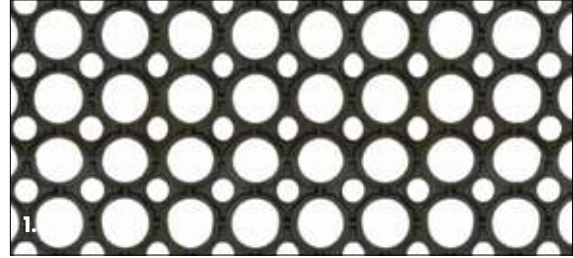

1. Black (For areas with water)
2. Red (Grease/Oil Resistant)
3. Black with GritTuff™



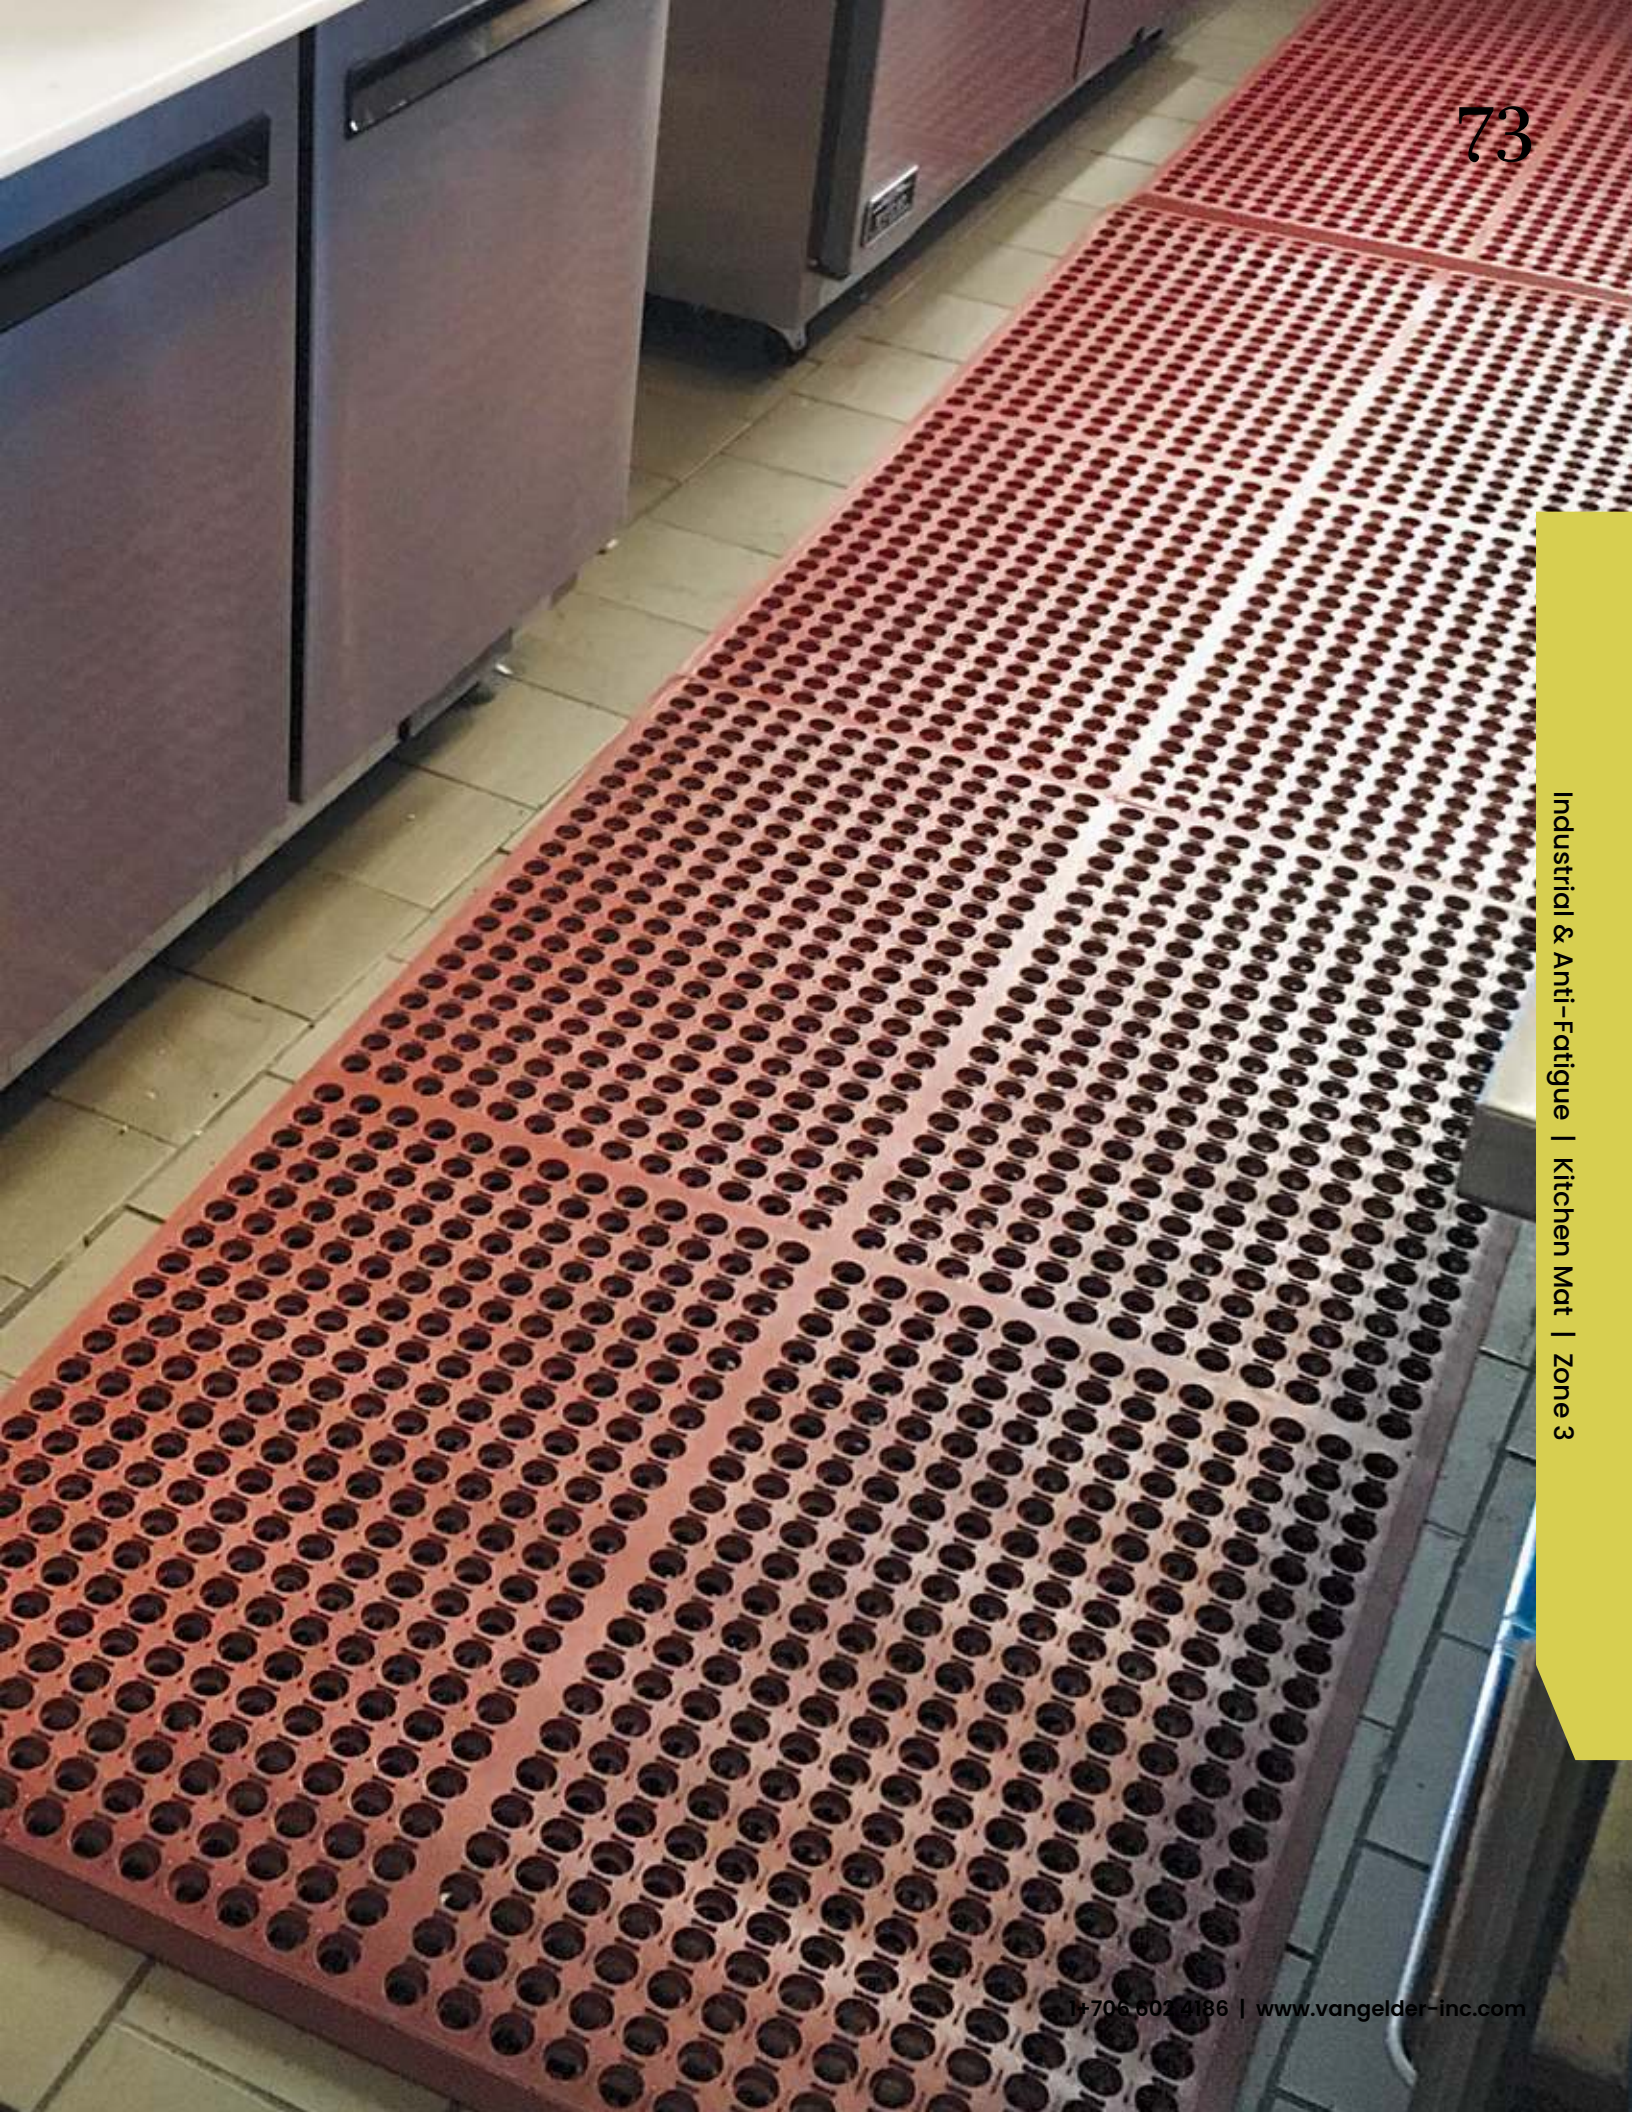

DIAMOND PLATE SAFETY STEP

9/16" DIAMOND-EMBOSSED ANTI-FATIGUE
MATTING



SPECIFICATIONS

Manufacturing Process:	Fusion-bonded Composite
Wear Surface:	3/16" Solid PVC Diamond-patterned
Cushioning:	Closed-cell PVC Foam
Overall Gauge ($\pm 0.050"$):	$\sim 9/16"$
Wear Layer Gauge ($\pm 0.10"$):	$\sim 1/8"$
Foam Cushion Density:	~ 20 lbs/ cu. ft.
Total Weight:	~ 1.7 lbs/sq. ft.

STANDARD MAT SIZES

2' x 3'

3' x 5'

STANDARD ROLL SIZES

2' x 75'

3' x 75'

4' x 75'

CUSTOM SIZES

Widths:	2', 3', 4' & Customs Sizes
Lengths:	Up to 60'

FLAMMABILITY RATING

Flame Resistance (FMVSS 302)	Pass
------------------------------	------



1. Solid Black
2. Black with Yellow Border





1. Grey/White/Black

2. Blue

3. White/Black

MARBLE STEP

1/2" SMOOTH PATTERNED ANTI-FATIGUE MAT



SPECIFICATIONS

Manufacturing Process:	Fusion-bonded Composite
Wear Surface:	~1/8" (0.125") of a Solid Marbleized PVC
Overall Gauge (± 0.050):	~1/2" (0.50")
Underside:	3/8" of an Ergo Flex closed-cell
Foam Cushion Density:	~20 lbs/ cu. ft.
Total Weight:	~1.5 lbs/sq. ft.

FLAMMABILITY RATING

Flame Resistance (FMVSS 302)	Pass
------------------------------	------

AVAILABLE SIZES

2' x 3'	2' x 60'	3' x 5'	3' x 60'	4' x 60'
---------	----------	---------	----------	----------

BUBBLE MAT

1/2" MOLDED RUBBER ANTI-FATIGUE
MATTING



SPECIFICATIONS

Construction:	100% Black Molded Rubber
Surface Aspect:	Air pocked "Bubble" design
Overall Gauge (± 0.050):	1/2"
Durometer (ASTM D2240):	85 $\pm$ 15 (average)
Total Weight:	1.85 lbs/sq. ft

AVAILABLE SIZES

2' x 3'	3' x 4'
---------	---------



1. Available in Solid Black Only

Non-Slip Flooring

COMFORT AND SAFETY IN WET, HEAVY-TRAFFIC ENVIRONMENTS.

Ideal for wet, high-traffic areas like commercial kitchens, SafeStep Plus is made from 90% post-industrial recycled content and is resistant to mildew and other bacterial growth.

SAFESTEP PLUS

RECYCLED NON-SLIP PVC FLOORING




Easy to clean with subtle anti-fatigue properties, SafeStep Plus has become a favorite among restaurateurs.

SPECIFICATIONS

Material:	90% Post-Industrial Recycled Homogeneous PVC
Overall Thickness:	1/4"
Sheet Size:	5' x 8'
Weight (ASTM D751):	25.16 oz./sq. ft.
Bacteria & Mildew Resistance (ASTM G21):	Excellent
Coefficient of Friction (ASTM D2047):	AVG: 1.31 (Dry), 1.07 (Wet)

FLAMMABILITY RATING

Fire Test Rating:	NFPA Type I
Critical Radiant Flux (ASTM E648)	1.05W/sq. cm
Burn Distance (ASTM E648)	12 cm
CM Oxygen Index	29.0

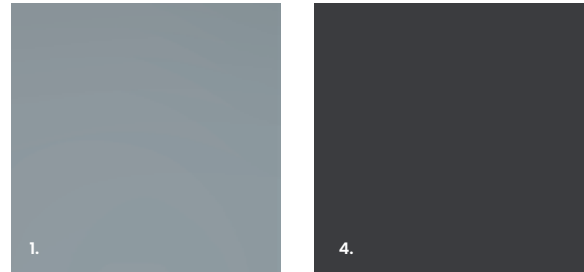

1. Slate
2. Pewter
3. Mesa

4. Charcoal
5. Mocha

Non-Slip Flooring | SafeStep Plus | Zone 3



Elements Recycled Rubber Flooring

Versatile & Customizable

From fitness centers to daycares and more, vG's extensive line of recycled rubber flooring can be selected from your choice of sheet/roll goods, square tiles or interlocking tiles. Can't find a blend you're looking for? Ask your representative about our 100% custom blend options.

AVAILABLE FORMS



SHEET/ROLL SIZES
4' Wide x 50' (Standard)
Up to 95' in length



SQUARE TILE SIZES
23" x 23"
24" x 24"



INTERLOCKING TILE SIZES
23" x 23"
24" x 24"

AVAILABLE THICKNESSES

1/2" (12 mm)
Custom Thickness

3/8" (9 mm)

5/16" (8 mm)


1/4" (6 mm)
Custom Thickness

3/16" (4 mm)



100 SERIES

10% COLOR | 90% BLACK



Elements 100 Series recycled rubber flooring is a heavy duty commercial rolled rubber flooring, and is the highest quality rubber gym flooring available.

PACKAGING & DIMENSIONS


Size	Colors	Thickness
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll)	Only Black 106, Lt. Grey 125 and Blue 127	4mm (3/16") Thick 6mm (1/4") Thick 8mm (5/16") Thick 9mm (3/8") Thick 12mm (1/2") Thick
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll)	Only Tan Clay 149, Blue/Lt. Grey 122, Red 109 and Terra Cotta 575	8mm (5/16") Thick 9mm (3/8") Thick
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll)	Only Yellow Moon 172, Green 126, Red 109, and Purple Rain 142	9mm (3/8") Thick
Square Tile 23" x 23" 500 sq. ft. minimum order (@ 137 tiles) @ 3.67 sq. ft. / Tile	Only Yellow Moon 172, Green 126, Red 109, Purple Rain 142	9mm (3/8") Thick
Square Tile 24" x 24" @ 4 sq. ft. / Tile no minimums	Only Black 106, Lt. Grey 125, Blue 127, Tan Clay 149 and Terra Cotta 575	9mm (3/8") Thick
Interlocking Tile 23" x 23" 500 sq. ft. minimum order (@ 137 tiles) @ 3.28 sq. ft. / Tile	Only Yellow Moon 172, Green 126, Red 109, Purple Rain 142	9mm (3/8") Thick
Interlocking Tile 24" x 24" @ 4 sq. ft. / Tile no minimums	Only Black 106, Lt. Grey 125, Blue 127, Tan Clay 149 and Terra Cotta 575	9mm (3/8") Thick

SPECIFICATIONS

Construction (ISO 2424):	SBR Rubber Black + 10% Color EPDM/Recycled Rubber
Density (ASTM D3676):	60 pcf - 80 pcf
Hardness (ASTM D2240 (Shore A)):	60 ± 5
Tear Strength (ASTM D624):	70pli - 80 pli min.
Elongation (ASTM D412):	>145% - 300%
Tensile Strength (ASTM D412):	200 psi - >220psi
Flexibility (ASTM F137 1/4" Mandrel):	Pass
Resistance to Chemicals (ASTM F825):	No Change
Force Reduction (ASTM F2772)	12.9% - 13.7%
Energy Restitution (ASTM F2772)	85% - 86%
Abrasion Resistance (ASTM D3389)	<1.7g. 1000 cycles
Static Load Limit (ASTM F970)	0.001' @ 250 PSI
Coefficient of Friction (ASTM D2047)	>0.95
Slip Resistance (ASTM F2772)	Pass
VOC Compliant (ASTM D6116 / CA 1350)	Yes
Rolling Load (EN1569)	Pass
Resistance to Impact (EN1517)	14 N/m
Resistance to Indentation (EN1516)	0.1mm
Vertical Deformation (ASTM F2772)	1.4mm
Indoor Air Quality (CA Spec 01350):	Pass
Coefficient of Friction (ASTM D2047):	> 0.96

LEED-NC

MR Credit 4, IEQ Credits 4.1, 5

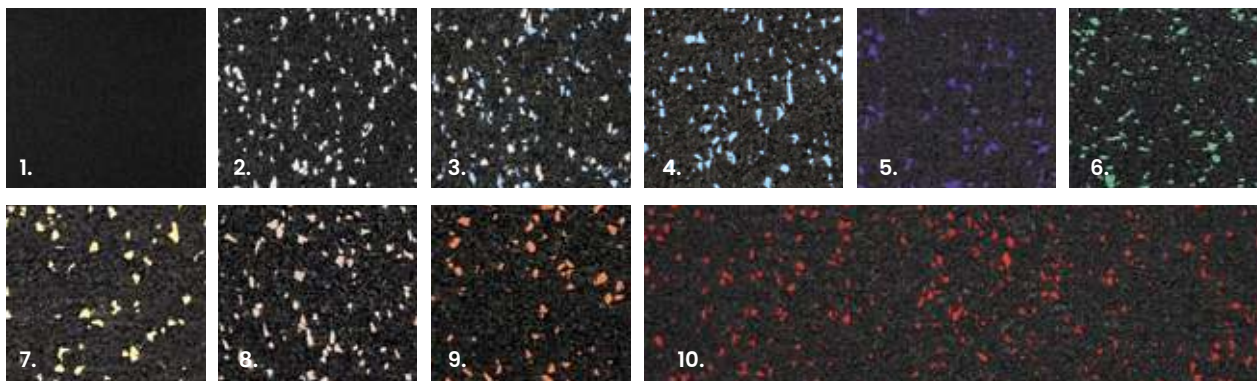

1. Black 106

2. Lt. Grey 125

3. Blue/Lt. Grey 122

4. Blue 127

5. Purple Rain 142

6. Green 126

7. Yellow Moon 172

8. Tan Clay 149

9. Terra Cotta 575

10. Red 109



200 SERIES

20% COLOR | 80% BLACK



ZONE



INDOOR



Elements 200 Series recycled rubber flooring is built for extreme durability with more color than the 100 Series.

SPECIFICATIONS

Construction (ISO 2424):	SBR Rubber Black + 20% Color EPDM/ Recycled Rubber
Density (ASTM D3676):	60 pcf - 80 pcf
Hardness (ASTM D2240 (Shore A)):	60 ± 5
Tear Strength (ASTM D624):	70pli - 80 pli min.
Elongation (ASTM D412):	>145% - 300%
Tensile Strength (ASTM D412):	200 psi - >220psi
Flexibility (ASTM F137 1/4" Mandrel):	Pass
Resistance to Chemicals (ASTM F825):	No Change
Force Reduction (ASTM F2772)	12.9% - 13.7%
Energy Restitution (ASTM F2772)	85% - 86%
Abrasion Resistance (ASTM D3389)	<1.7g. 1000 cycles
Static Load Limit (ASTM F970)	0.001" @ 250 PSI
Coefficient of Friction (ASTM D2047)	>0.95
Slip Resistance (ASTM F2772)	Pass
VOC Compliant (ASTM D6116 / CA 1350)	Yes
Rolling Load (EN1569)	Pass
Resistance to Impact (EN1517)	14 N/m
Resistance to Indentation (EN1516)	0.1mm
Vertical Deformation (ASTM F2772)	1.4mm
Indoor Air Quality (CA Spec 01350):	Pass
Coefficient of Friction (ASTM D2047):	> 0.96

LEED-NC

MR Credit 4, IEQ Credits 4.1, 5

PACKAGING & DIMENSIONS

Size	Colors	Thickness
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll)	Lt. Grey 2125, Snow Flakes 2138, Blue Sparkle 2127, Blue Pool 2528, Crushed Nuts 2153, Gold Rush 2529 Red 2109, Orange 2527	9mm (3/8") Thick
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll)	Only Orange, Green, Tan (all mixed w/ white)	12mm (1/2") Thick
Square Tile 23" x 23" 500 sq. ft. minimum order (@ 137 tiles) @ 3.67 sq. ft. / Tile	All Colors available except Orange, Green and Tan (mixed with white)	9mm (3/8") Thick
Interlocking Tile 23" x 23" 500 sq. ft. minimum order (@ 137 tiles) @ 3.28 sq. ft. / Tile	Orange, Green and Tan (All mixed with white)	9mm (3/8") Thick




1.



2.




3.




4.




5.



6.



7.



8.

1. Lt. Grey 2125
7. Orange 2527


2. Snow Flakes 2138
8. Red 2109

3. Blue Sparkle 2127

4. Blue Pool 2528


5. Crushed Nuts 2153

6. Gold Rush 2529

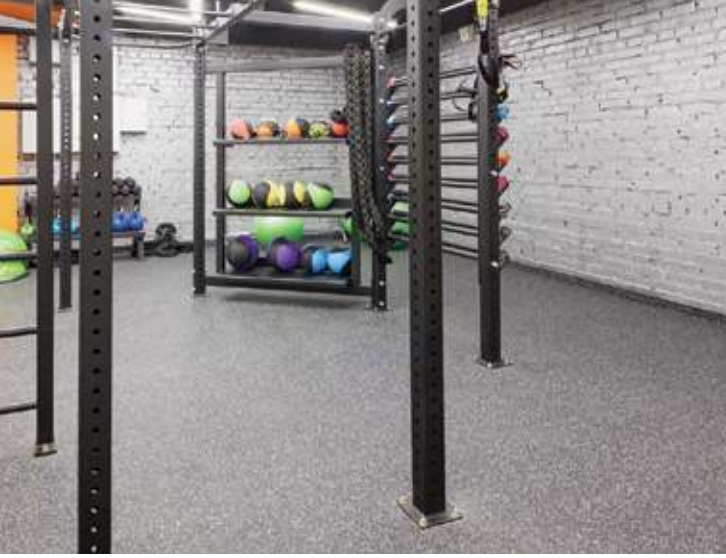

350 SERIES

35% COLOR | 65% BLACK



Elements 350 Series recycled rolled rubber offers a burst of color that will make your facility stand out amongst all others.

SPECIFICATIONS


Construction (ISO 2424):	SBR Rubber Black + 35% Color EPDM/ Recycled Rubber
Density (ASTM D3676):	60 pcf - 80 pcf
Hardness (ASTM D2240 (Shore A):	60 ± 5
Tear Strength (ASTM D624):	70pli - 80 pli min.
Elongation (ASTM D412):	>145% - 300%
Tensile Strength (ASTM D412):	200 psi - >220psi
Flexibility (ASTM F137 1/4" Mandrel):	Pass
Resistance to Chemicals (ASTM F825):	No Change
Force Reduction (ASTM F2772)	12.9% - 13.7%
Energy Restitution (ASTM F2772)	85% - 86%
Abrasion Resistance (ASTM D3389)	<1.7g. 1000 cycles
Static Load Limit (ASTM F970)	0.001' @ 250 PSI
Coefficient of Friction (ASTM D2047)	>0.95
Slip Resistance (ASTM F2772)	Pass
VOC Compliant (ASTM D6116 / CA 1350)	Yes
Rolling Load (EN1569)	Pass
Resistance to Impact (EN1517)	14 N/m
Resistance to Indentation (EN1516)	0.1mm
Vertical Deformation (ASTM F2772)	1.4mm
Indoor Air Quality (CA Spec 01350):	Pass
Coefficient of Friction (ASTM D2047):	>0.96

LEED-NC

MR Credit 4, IEQ Credits 4.1, 5

PACKAGING & DIMENSIONS

Size	Colors	Thickness
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll)	Grass Green 522, Blue Bahia 523, Milky Way 503, Rouge 524, Terrific Tan 505, Fiesta Purple 525, Salt and Pepper 526	9mm (3/8") Thick
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll)	Only Blue Bahia 523, Rouge 524, Salt & Pepper 526	12mm (1/2") Thick
Square Tile 23" x 23" 500 sq. ft. minimum order (@ 137 tiles) @ 3.67 sq. ft. / Tile	All Colors available	9mm (3/8") Thick
Interlocking Tile 23" x 23" (@ 153 interlocking) @ 3.28 sq. ft. / Tile	All Colors available	9mm (3/8") Thick

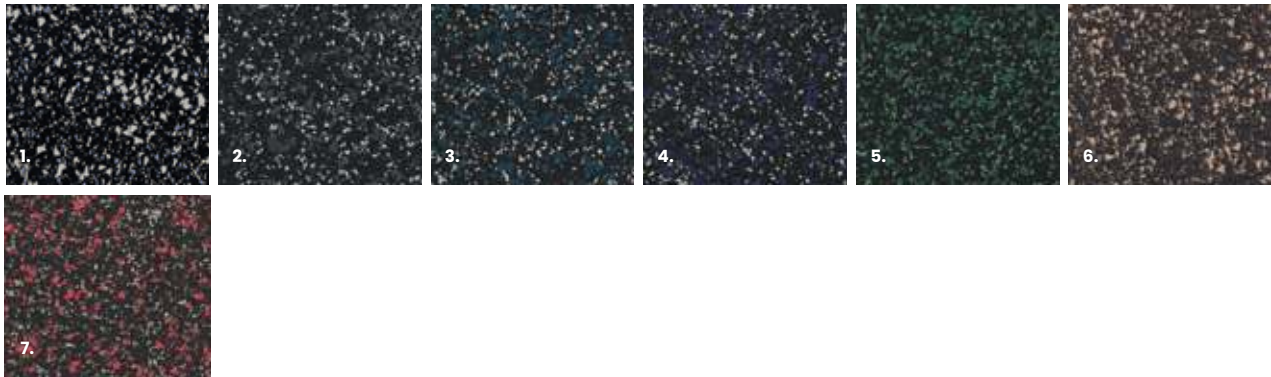

1. Milky Way 503
7. Rouge 524

2. Salt and Pepper 526

3. Blue Bahia 523

4. Fiesta Purple 525

5. Grass Green 522

6. Terrific Tan 505

82



950 SERIES

95% COLOR | 5% BLACK



Elements 950 Series recycled rubber flooring is built for extreme durability with an average of 95% more color than the 100 Series.

SPECIFICATIONS

Construction (ISO 2424):	SBR Rubber Black + 95% Color EPDM/Recycled Rubber
Density (ASTM D3676):	60 pcf - 80 pcf
Hardness (ASTM D2240 (Shore A)):	60 ± 5
Tear Strength (ASTM D624):	70pli - 80 pli min.
Elongation (ASTM D412):	>145% - 300%
Tensile Strength (ASTM D412):	200 psi - >220psi
Flexibility (ASTM F137 1/4" Mandrel):	Pass
Resistance to Chemicals (ASTM F825):	No Change
Force Reduction (ASTM F2772):	12.9% - 13.7%
Energy Restitution (ASTM F2772):	85% - 86%
Abrasion Resistance (ASTM D3389):	<1.7g. 1000 cycles
Static Load Limit (ASTM F970):	0.001" @ 250 PSI
Coefficient of Friction (ASTM D2047):	>0.95
Slip Resistance (ASTM F2772):	Pass
VOC Compliant (ASTM D6116 / CA 1350):	Yes
Rolling Load (EN1569):	Pass
Resistance to Impact (EN1517):	14 N/m
Resistance to Indentation (EN1516):	0.1mm
Vertical Deformation (ASTM F2772):	1.4mm
Indoor Air Quality (CA Spec 01350):	Pass
Coefficient of Friction (ASTM D2047):	>0.96

LEED-NC

MR Credit 4, IEQ Credits 4.1, 5

PACKAGING & DIMENSIONS

Size	Colors	Thickness
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll) 200 sq. ft. minimum order	Only Stocked Colors Avalanche 424-7 Granite Grey 424-73 Grizzly 424-17 Check availability with your rep for other listed colors.	4mm (3/16") Thick 8mm (5/16") Thick
Square Tile 24" x 24" 200 sq. ft. minimum order @ 4 sq. ft./Tile	Only Stocked Colors Avalanche 424-7 Granite Grey 424-73 Grizzly 424-17 Check availability with your rep for other listed colors	4mm (3/16") Thick 8mm (5/16") Thick
Interlocking Tiles 24" x 24" 200 sq. ft. minimum order @ 4 sq. ft./Tile	Only Stocked Colors Avalanche 424-7 Granite Grey 424-73 Grizzly 424-17 Check availability with your rep for other listed colors	4mm (3/16") Thick 8mm (5/16") Thick

Note: The 950 Series colors listed are custom and have minimums, plus longer lead times. Contact your representative for more information.



The 950 Series has three colors that are **STOCKED**.

- Avalanche 424-7
- Granite Grey 424-73
- Grizzly 424-17

All other colors listed are custom and have minimums, plus longer lead times.

1. Metal In Mud 424-2
7. Grizzly 424-17

2. Avalanche 424-4
8. Shooting Star 424-52

3. Granite Grey 424-73
9. Tempe Sunset 424-19

4. Volcanic Ash 424-54

5. Gulf Blue 424-51

6. Volcanic Flow 424-10



Offered in a wide range of colors, Monster Tile gives you the ability to tailor your space and complement the aesthetics of your gym. The highest quality rubber gym flooring available.

MONSTER TILE

100 • 350 • 950 SERIES




SPECIFICATIONS

Construction:	100% Recycled SBR Rubber % selected of EPDM granules & polyurethane binder
Tile Size:	24" x 24" x 1"
Tile Weight:	18.0 lbs/tile
Standard Reducer Dimensions:	1' x 4' x 48"
Standard Reducer Weight:	4 lbs. per reducer
ADA Reducer Dimensions:	1' x 12' x 48"
ADA Reducer Weight:	14 lbs. per reducer
Density Top layer (ASTM D3676):	60-80 pcf (Depends on surface color)
Shore A Hardness (ASTM D2240):	60 ± 5
Tear Strength (ASTM D2240):	70 pli min.
Elongation (ASTM D412):	>150%
Tensile Strength (ASTM D412):	>200psi
Resistance to Chemicals (ASTM F925):	No Change
Coefficient of Friction (ASTM D2047):	>0.95
Impact Insulation Class (IIC) (ASTM E492):	STC: > 54, IIC: > 57, ΔIIC: > 27
Critical Radiant Flux (ASTM E648):	Class II
Force Reduction (ASTM F2772):	<50%
LEED-NC	MR Credit 4, IEQ Credits 4.1, 5

PACKAGING & DIMENSIONS


Size	Colors	Thickness
24" x 24" x 1" Square Tiles @ 4 sq. ft./Tile	100 series 6 colors listed on page 85 only	25.4mm (1") Thick
24" x 24" x 1" Square Tiles @ 4 sq. ft./Tile	350 series 4 colors listed on page 85 only	25.4mm (1") Thick
24" x 24" x 1" Square Tiles @ 4 sq. ft./Tile	950 series 7 colors listed on page 85 only	25.4mm (1") Thick

100 SERIES

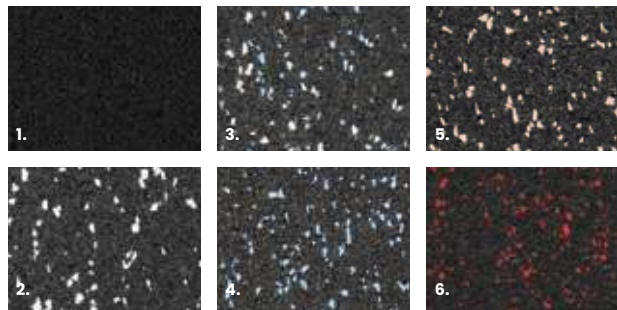


1. Black MT-106
2. Lt. Grey MT-125
3. Blue/Lt. Grey MT-122
4. Blue MT-127
5. Tan Clay MT-149
6. Red MT-109

350 SERIES

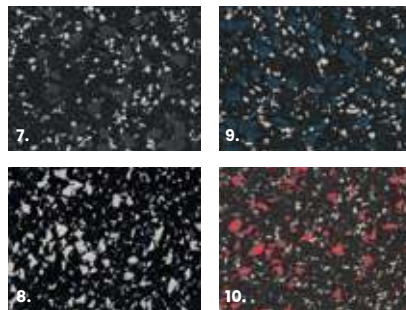

7. Milky Way MT-503
8. Salt & Pepper MT-526
9. Blue Bahia MT-523
10. Rouge MT-524

950 SERIES

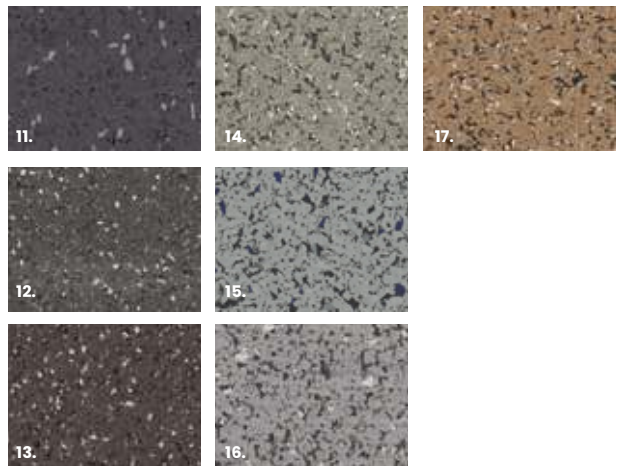

11. Granite Grey MT-4247
12. Storm Cloud MT-952
13. Hot Chocolate MT-953
14. Graphite MT-954
15. Mica MT-951
16. Avalanche MT-4244
17. Sandstone MT-956



Bottom of Tile

Dowels

Installation



It's In The Details

*Accessories & Adhesives
for your floors.*

ADHESIVES OVERVIEW

FOR YOUR FLOORS



440-GLDSTK

*Multi-Purpose Nontoxic
Indoor Adhesive**

Great For:

- Smooth backed Sheet/Roll Goods Carpeting
- Sheet Vinyl/VCT
- Indoor Applications



631-1100

*All-Weather Water-Based
Adhesive**

Great For:

- Rubber backed Sheet/Roll Goods Carpeting (no vinyl backing)
- Outdoor Applications



2420

*Universal White Acrylic
Resilient Antimicrobial Indoor
Adhesive**

Great For:

- Luxury Vinyl Plank
- Luxury Vinyl Tile
- Indoor Applications
- Bitumen backed Carpet Tile



Lock P799 I/O Rubber


*Moisture Cured Polyurethane
Indoor/Outdoor Rubber
Adhesive**

Great For:

- Recycled Rubber Flooring
- Indoor Applications




MAT EDGING



LOW PROFILE
0.25" Vinyl Reducer Edging

Great For:


- Plain/Custom Matting (Pg. 37)



MEDIUM PROFILE
0.32" Vinyl Reducer Edging

Great For:

- Logo Matting (Pg. 37)
- Champion Super Nop (Pgs. 10-11 & 40-41)



HIGH PROFILE
0.375" Vinyl Reducer Edging

Great For:

- Frontrunner (Pg. 56)
- Frontrunner Plus (Pg. 57)
- Natural Coco Matting (Pg. 45)


*All edging offered in
matte black or brown
finishes.*



Metal Transitions


vG offers an extensive line of aluminum frames and transitions for all of our products to ensure smooth transitions and worry free installations.

Mill-Finished Pre-Drilled ALUMINUM FRAMES

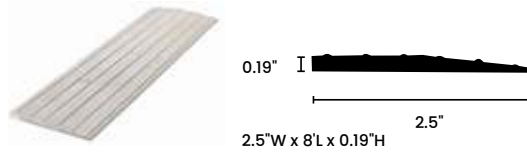


THRESHOLD-001

Mill-Finished Pre-Drilled Aluminum Frame 10 holes - Low Profile

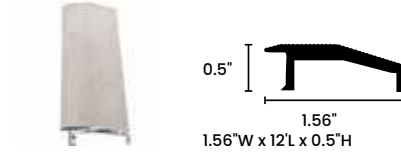


RLPX RAMP

Mill-Finished Pre-Drilled Aluminum Frame

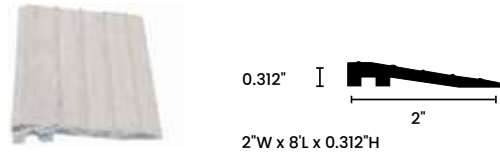


RAMP-5207

Mill-Finished Pre-Drilled Aluminum Frame 10 holes

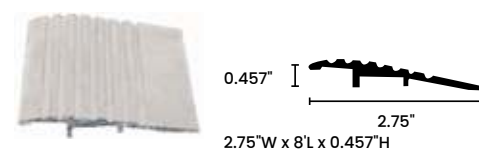


OVERLAP RAMP-81611

Mill-Finished Pre-Drilled Aluminum Frame 10

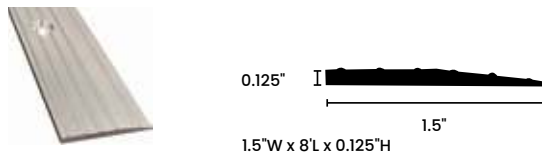


LVT 1-8-0

Mill-Finished Pre-Drilled Aluminum Frame 16 holes Low Profile

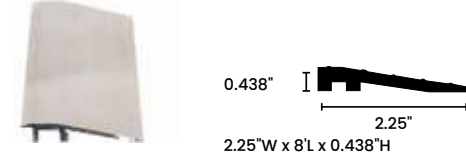

SMF-17

Mill-Finished Pre-Drilled Aluminum Frame 10 holes - Low Profile

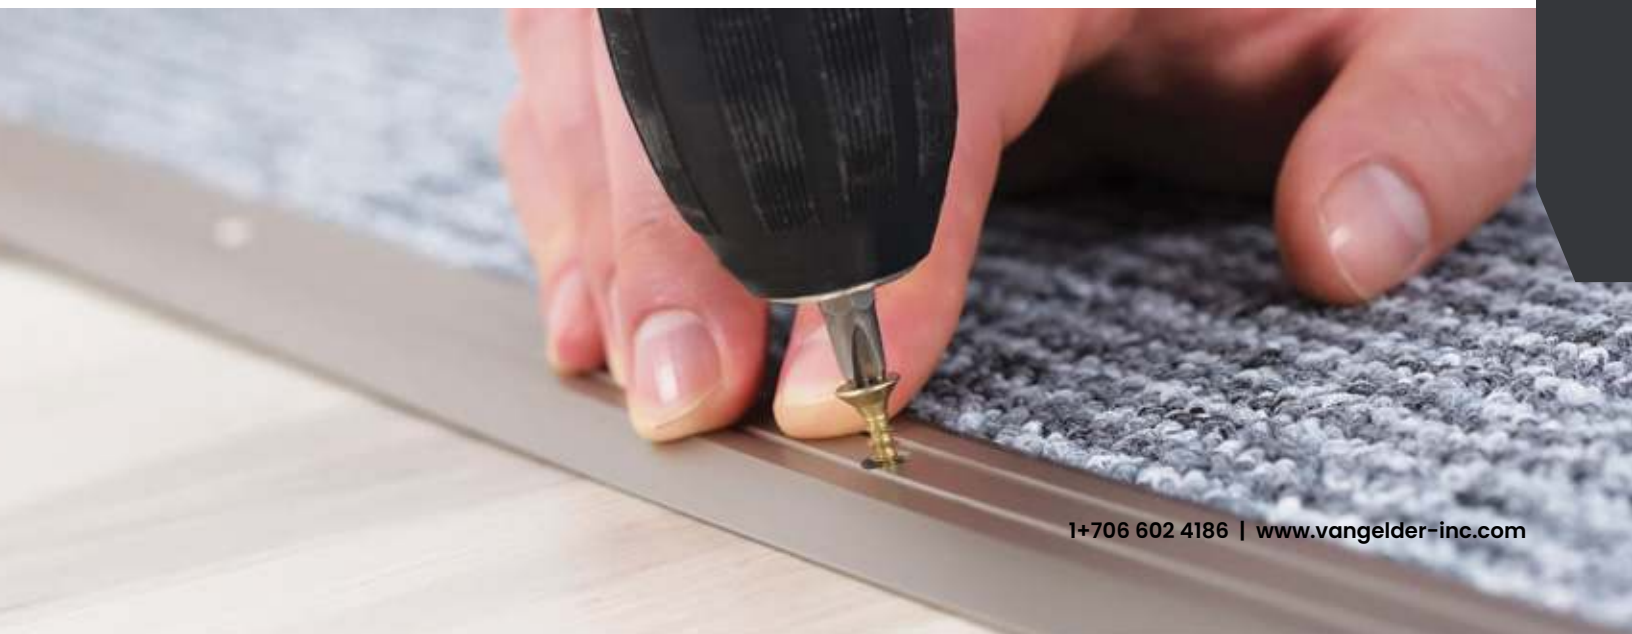



GENERAL MAINTENANCE

PREVENTATIVE MAINTENANCE

Your carpet is not only a valuable investment but its appearance tells your visitors something about you. The main objective of a maintenance program is to preserve, as nearly as practical, the original beauty and appearance of the carpet and prolong its useful life.

Preventative maintenance will protect your investment, but you must plan, or program that maintenance. In the past, carpets have been neglected only to be cleaned when it was obvious that attention was necessary. This is known as "Crisis Cleaning". This approach is not only old fashioned but has been proven to be a false economy. In addition to the carpet looking scruffy, its life is being drastically reduced.

Preventative maintenance, which has to be planned, will extend the life and enhance the appearance of the carpet because the carpet "destroyer" [soil] will be effectively removed.

REMOVING SPOTS & STAINS

Remember to apply cleaning agent to a blotting towel rather than directly onto the carpet. First remove any excess caused by stain, food, etc. and ensure that the area affected does not grow in size. Blot the area with a full roll of kitchen towels in order that as much fluid as possible can be absorbed. Always work towards the center. Pretest your carpet by wetting a small area (2 in. by 2 in.) in an inconspicuous area with the solution you plan to use. Blot the damp area with a white towel and look for any color absorbed into the towel, or any color change on the carpet.

Dab the spotting agent onto the stain with the moistened towel - working from the outer edge of the stain inward towards the center to keep the stain from spreading. For effective blotting action use pressure from the hand - for even more pressure use the heel of the foot. Avoid the natural tendency to scrub. Try blotting for a prolonged period of time. (The stain will naturally soak up into a weighted sack of towels.)

Stains marked with a "P" will definitely require professional attention.

TYPE OF STAIN PROCEDURE

Alcohol, Beer	3 or P
Blood	7
Butter	1 or P
Chewing Gum	6
Chocolate	4
Coffee	3 or P
Crayon	1
Egg	2
Excrement	2 or P
Food Color*	2
Fruit Juice	4 or P
Furniture Polish	1 or P
Furniture Polish w/stain	1 or P
Glue-Model Cement	8
Glue- White	2
Gravy	4 or P2
Hair Spray	1 or P
Hand Lotion	1 or P
Ice Cream	4
Ink (Ballpoint)	1 or P
Ink (Marking Pen)	1
Ketchup	2
Lipstick	1
Oil (Cooking)	1 or P
Oil (Furniture)	1 or P
Mascara	1
Mayonnaise	2
Milk	4
Nail Polish	8
Paint (Latex)	5
Paint (Oil Based)	1 or P
Rust	P
Shoe Polish (Liquid)	1 or P
Shoe Polish (Paste)	1
Soft Drinks	4 or P
Sugary Sweets	4
Tar	1
Tea	3 or P
Urine	4 or P
Water Colors	5
Wax candle	6
Wine	4 or P

SEQUENCE OF PROCEDURES

Apply the following procedures in the correct order. Blot after each procedure.

CODE PROCEDURES

1. Solvent, blot, Detergent, blot, then water, blot.
2. Detergent, blot, Ammonia, blot, Detergent, blot, then water, blot.
3. Detergent, blot, Vinegar, blot, Detergent, blot, water, blot.
4. Detergent, blot, Ammonia, blot, Vinegar, blot, Detergent, blot, water, blot.
5. Detergent, blot, Ammonia, blot, water, blot, Solvent, blot.
6. Freeze with ice cubes, shatter with blunt object. Vacuum out chips, apply solvent, and blot (Or, for wax, place paper towels or bag over wax, iron with warm (not hot) iron to absorb).
7. Cool water, blot, Ammonia, blot, Detergent, blot, Ammonia, blot, water, blot.
8. Polish remover (not oily), blot and repeat.

DETERGENT SOLUTION

Mix a quality carpet/upholstery shampoo or soap flakes dissolved at the rate of two tablespoons per gallon of lukewarm water. Do not use dish washing soap.

SOLVENT

Any consumer brand of dry cleaning solvent.





INDEX

A - B

Adhesive & Accessories	87
Adhesive Overview	88
Aluminum Overlap	91
Aluminum Threshold Low-Profile	91
Aluminum Transition	91
Atlas	9
Atlas Plus	28
Bubble Mat	75

C

Carpet Tile	20
Champion LP	22
Champion Super Nop	10-11, 21, 40-41
Champion XP	22
Channel Rib	46
Comfort Step-42	70
Comfort Step Diamond	71
Comfort Step ESD	71
Commercial Mats	45
Company History	4
Cross Guard	33
Custom Logo Matting	37
Cougar	13

D - E

Diamond Plate Safety Step	74
Diplomat	24-25
Dominator	23
Dominator LP	26
Eagle	14, 39
Elements 100 Series	79
Elements 200 Series	80
Elements 350 Series	81
Elements 950 Series	82-83
Elite Step	70

F - G

Fenway Nop	15, 39
Freestahl	34
Fronrunner & LP	56
Fronrunner Plus & LP	57
Fronrunner Plus SB	59
Fronrunner SB	58
General Maintenance	92-93
Grid Entry Systems	55

H - L

Heron Rib	61
Heron Tile	60
Index	95

Industrial Mats	68
Kitchen Mat	72-73
Logo/Custom Matting Lead Times	38
LEED Credits	5
Lock P799 I/O Rubber	88
Luxury Step	69
Luxury Vinyl Planks & Tile	49

M

Marble Step	75
Mat Edging	89
Metal Transitions	90
Monster Tile	84-85
Monster - 100	85
Monster - 350	85
Monster - 950	85

N - Q

Natural Coco/Coir	17, 43
Natures View Oak Collection 20MIL 4" x 36"	50
Natures View Rustique 40MIL 6"x 36"	51
Natures View Rustique 40MIL 7"x48"	52-53
Natures View Style Rustique 40MIL 18"x 18"	54
Needlepunch	8-17
Non-Slip Flooring	76
Noordic Tile	35
Nylons	18

R - T

Recessed Ancillaries	67
Recess or Surface Mounted Ancillaries	66
Ribbed Tiles	27
Recycled Rubber Flooring	78
Rover Tile	36
SafeGuard Giant Tiles	31
Safestep Plus	77
Senator SoftStep	30
Sheet/ Roll Goods	8
Snap Trax Tile	63
Snap Trax Plus	64
S-Trax Tile	65
Superior Nop	12
Synthetic Coco	16, 43
Tidal Mat / Tidal Diamond Mat	47
Two-N-One Mat	44, 62
TacFast™	29

U - Z

Windsor	19, 32, 39
Zone Systems	6-7



van Gelder Inc.

HQ1: 300 Union Grove Road SE
Calhoun, GA 30701

HQ2: 102 Trade Street
Greer, SC 29651

1+706 602 4186 | sales@vangelder-inc.com
www.vangelder-inc.com

©2024 van Gelder Inc.
All Rights Reserved.

vG_2024cat_011425

